


Basic holder MS16/MS22 Hydraulic expansi, reduced clamping force


Technical data

Slide system MS	MS16/MS22
Drive	not live
Fixation MS	Splined key/pin
Mounting	Hydraulic expansion chuck D36
X [mm]	19,3 (076")
Y [mm]	—
Z [mm]	29 (1.14)
INDEX TRAUB products	MS16-6 • MS22-6 • MS22-8 • MS16-6 Plus



Note

Reduced clamping force for high-frequency spindles.

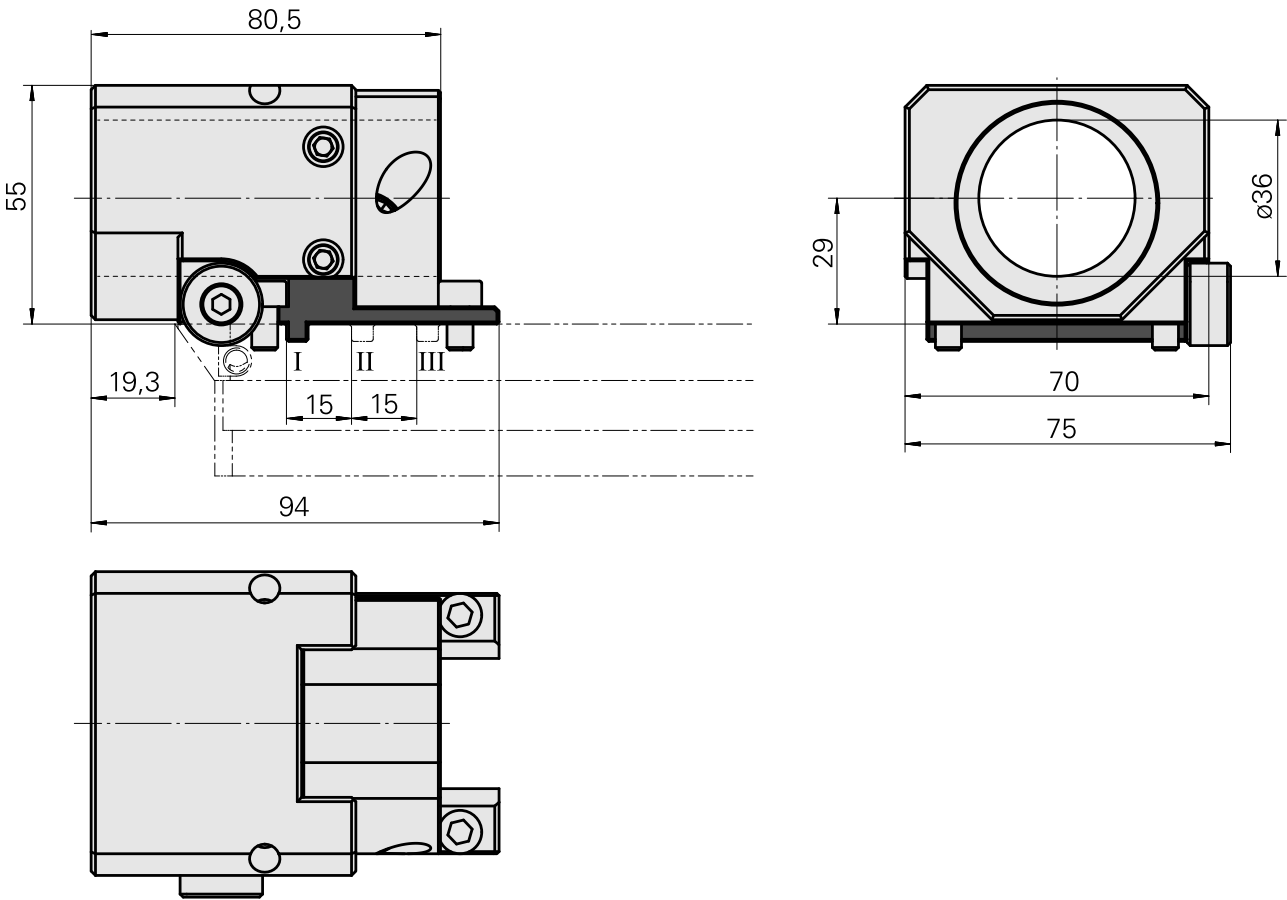

Documents

Product notes

[DE \(pdf\)](#)[EN \(pdf\)](#)[FR \(pdf\)](#)[FR \(pdf\)](#)[EN \(pdf\)](#)[DE \(pdf\)](#)

Accessories

Required for operation

[high-frequency spindle](#)

Product ID : 12055499

Previous product ID :

Electrical assemblies
DC motor

Current
24 Ampere

Voltage
49 Volt

(Nominal) speed (rpm)
60000 1/minute

Rated power W
900 Watt

Protection class
IP55

Optional accessories

Other accessories

[Chucking sleeve, reduced clamping force](#)

Product ID : 12137424

Previous product ID :
