


## Gear cutting unit 1:1

### Technical data

Drive	Direct drive
Speed ratio	1:1
X [mm]	–
Y [mm]	–
Z [mm]	–
INDEX TRAUB products	MS32-6.2 • MS32-6.3 • MS40-6 • MS40-8 • MS52-6.3 • MS32C



### Note


Fluid-cooled motor.

Separate intermediate plate required for assembly.

Only limited extent of use in positions 1 to 3 possible.

Solution Line controller.

This unit is delivered with standard controller parameters (UNIT number). However, in certain machining cases, application-specific parameters may be required to achieve the desired manufacturing quality. In such cases, we recommend a drive commissioning/optimization service, which we will be happy to offer you separately.

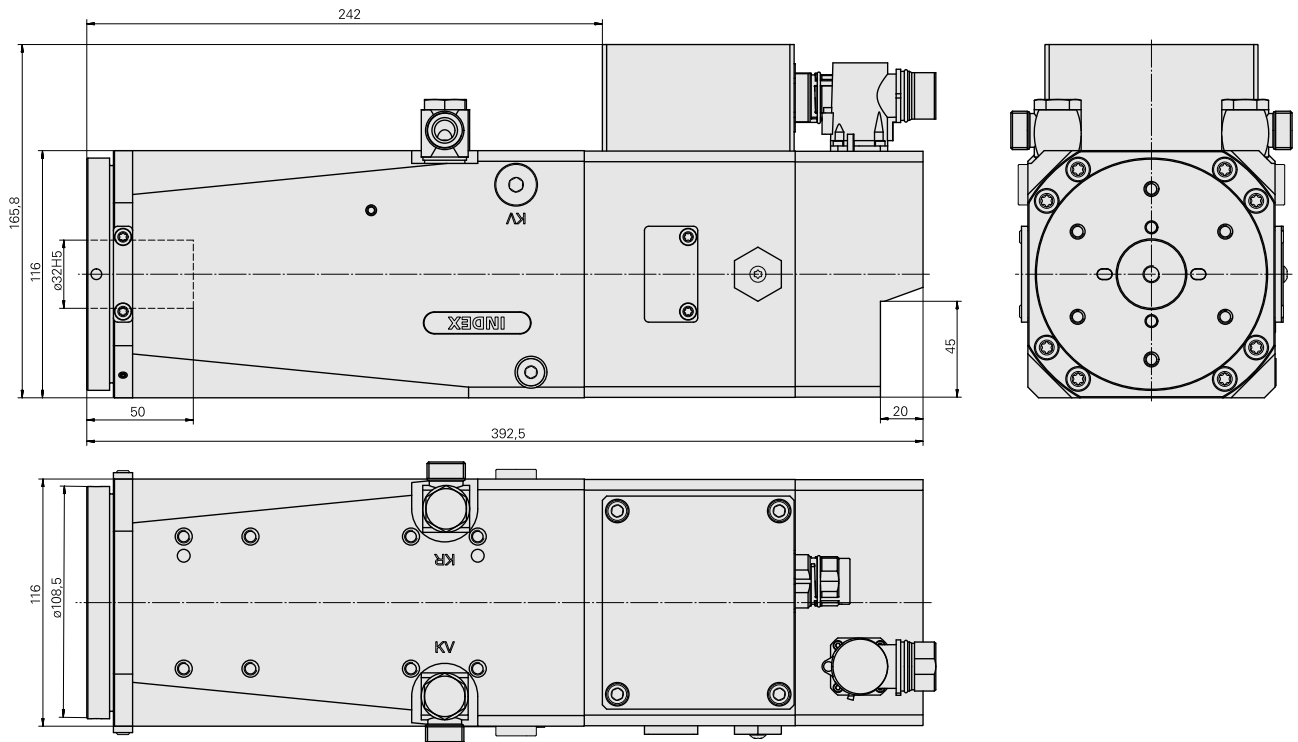

## Documents

### Product notes

[DE \(pdf\)](#)

[EN \(pdf\)](#)

[FR \(pdf\)](#)

## Accessories

Required for operation

### [Cable kit, 4m](#)

Product ID : 10458632

Previous product ID : GM5101.0267

---

### [Hose set](#)

Product ID : 12133467

Previous product ID :

---

Optional accessories

### Other accessories

### [Tool mounting](#)

Product ID : 12047398

Previous product ID :

---