

Broaching and slotting tool holder
Broaching and slotting unit

Broaching and slotting tool holder / broaching and slotting unit



Our broaching and slotting tool holders and units are designed such that you can often do away with a broaching or slotting machine. This takes you another step towards complete machining of workpieces on your lathe.

Slotting of centric outside or inside profiles is performed with a stationary broaching and slotting tool holder.

Eccentric profiles can be produced with a live broaching and slotting tool holder free of twists.

Application examples:

- Hexagon socket
- Square socket
- Inside Torx
- External spline shaft toothing


Please feel free to contact us if you have any further questions +49 711 3191-9854 or visit us online: ixshop.ixworld.com

Selections


Use with 3/4" and 1" shank



Use with VDI, with various fastenings

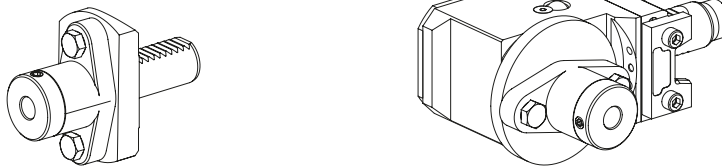


Use with 36 mm shank and compact shank

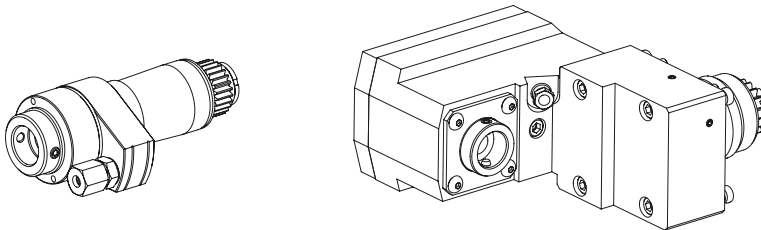


Matching slotting tools can be found on the Internet at ixshop.ixworld.com in Section "Tool holder accessories (Cutting tools)"


Other dimensions or profiles on request!




Slotting tool with shank diameter 8mm, for hexagon socket AF3-6mm for machining steel DIN1651 (9S20k) and non-ferrous metals



Slotting tool with shank diameter 12mm, for hexagon socket AF2-14mm for machining steel DIN1651 (9S20k) and AF2-17mm for non-ferrous metals



Slotting tool with shank diameter 12mm, for square socket AF3-12mm for machining steel DIN1651 (9S20k) and non-ferrous metals



Slotting tool with shank diameter 12mm
Torx 15-55 for machining steel DIN1651 (9S20k)
Torx 15-70 for non-ferrous metals

For more information see ixshop.ixworld.com

INDEX

LY9002.9557 10.23 Printed in Germany Subject to change without prior notice

INDEX-Werke GmbH & Co. KG Hahn & Tessky

Plochinger Straße 92
D-73730 Esslingen

Fon +49 711 3191-0
Fax +49 711 3191-587

info@index-werke.de
www.index-werke.de