

INDEX

TRAUB



INDEX C200 - VDI30

Tool holder

Overview

Note on applicability


Illustrations in this publication may deviate from the product supplied. Errors and omissions due to technical progress expected.

A word on copyright

This document is protected by copyright and was originally compiled in German.


The duplication and distribution of this document or parts thereof is prohibited without prior consent of the copyright owner, and any violators will be prosecuted. All rights, including the right to translate, are reserved.

© Copyright by INDEX-Werke GmbH & Co. KG




11018887 Bar stop, live

Fixation	none
Mounting	–
Cooling	–
X / Y / Z	92 (3.62) / – / 31 (1.22) mm (")




10900227 Bar stop, live

Fixation	–
Mounting	D58 (2.28 ")
Cooling	–
X / Y / Z	– / – / 30 (1.18) mm (")




10452051 Bar stop, live

Fixation	–
Mounting	D85 (3.35 ")
Cooling	–
X / Y / Z	– / – / 30 (1.18) mm (")

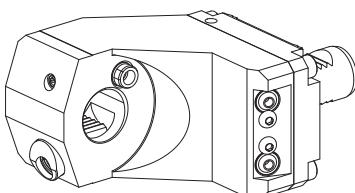


10352569 Compensation holder

Fixation	W serration
Mounting	VDI 30
Cooling	external and internal, p _{max} 20 bar
X / Y / Z	90 (3.54) / – / -32 (-1.26) mm (")




10596518 Compensation holder

Fixation	W serration
Mounting	VDI 30
Cooling	external and internal, p _{max} 40 bar
X / Y / Z	90 (3.54) / – / 2 (0.08) mm (")




10047863 Compensation holder

Fixation	W serration
Mounting	VDI 40
Cooling	external and internal, p _{max} 20 bar
X / Y / Z	90 (3.54) / – / -5 (-0.20) mm (")




11025010 Compensation holder

Fixation	W serration
Mounting	VDI 40
Cooling	external and internal, p _{max} 20 bar
X / Y / Z	90 (3.54) / – / 5 (0.20) mm (")




10206590 Drilling tool holder

Fixation W serration
Mounting INDEX TRAUB CAPTO C3
Cooling internal, p_{\max} 80 bar
X / Y / Z 62 (2.44) / - / 16 (0.63) mm (")




10871976 Drilling tool holder

Fixation -
Mounting INDEX TRAUB CAPTO C3
Cooling internal, p_{\max} 80 bar
X / Y / Z 62 (2.44) / - / 16 (0.63) mm (")




10241348 Drilling tool holder

Fixation W serration
Mounting INDEX TRAUB CAPTO C4
Cooling internal, p_{\max} 80 bar
X / Y / Z 71 (2.80) / - / 16 (0.63) mm (")




10192281 Drilling tool holder

Fixation W serration
Mounting ER 25
Cooling external and internal, p_{\max} 80 bar
X / Y / Z 90 (3.54) / - / 29 (1.14) mm (")




10818248 Drilling tool holder

Fixation W serration
Mounting ER 32
Cooling external and internal, p_{\max} 80 bar
X / Y / Z 90 (3.54) / - / 50 (1.97) mm (")




11068104 Drilling tool holder

Fixation W serration
Mounting ER 40
Cooling external and internal, p_{\max} 80 bar
X / Y / Z 90 (3.54) / - / 56 (2.20) mm (")




10339935 Drilling tool holder

Fixation Vee bar
Mounting ER 40
Cooling external and internal, p_{\max} 80 bar
X / Y / Z 90 (3.54) / - / 56 (2.20) mm (")




10091356 Drilling tool holder, vertically adjustable

Fixation	W serration
Mounting	DIN 1835 B/E D32 (1.26 ")
Cooling	external and internal, p_{\max} 40 bar
X / Y / Z	90 (3.54) / \pm 1.5 (\pm 0.06) / 30 (1.18) mm (")

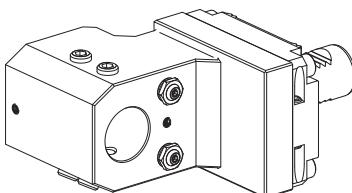


10092885 Drilling tool holder

Fixation	W serration
Mounting	DIN 1835 B/E D32 (1.26 ")
Cooling	external and internal, p_{\max} 80 bar
X / Y / Z	100 (3.94) / - / - mm (")




10347147 Drilling tool holder

Fixation	W serration
Mounting	DIN 1835 B/E D32 (1.26 ")
Cooling	external and internal, p_{\max} 80 bar
X / Y / Z	110 (4.33) / - / 30 (1.18) mm (")




10378226 Drilling tool holder

Fixation	W serration
Mounting	DIN 1835 B/E D32 (1.26 ")
Cooling	external, p_{\max} 80 bar
X / Y / Z	90 (3.54) / - / 35 (1.38) mm (")




10745501 Drilling tool holder

Fixation	W serration
Mounting	DIN 1835 B/E D32 (1.26 ")
Cooling	external and internal, p_{\max} 80 bar
X / Y / Z	100 (3.94) / - / 30 (1.18) mm (")




10941548 Drilling tool holder

Fixation	W serration
Mounting	DIN 1835 B/E D32 (1.26 ")
Cooling	external and internal, p_{\max} 80 bar
X / Y / Z	90 (3.54) / - / 30 (1.18) mm (")




10752081 Drilling tool holder

Fixation	W serration
Mounting	DIN 1835 B/E D40 (1.57 ")
Cooling	external and internal, p_{\max} 80 bar
X / Y / Z	90 (3.54) / - / 30 (1.18) mm (")




10452728 Drilling tool holder

Fixation	W serration
Mounting	D40 (1.57 ")
Cooling	external and internal, p_{max} 80 bar
X / Y / Z	110 (4.33) / - / 30 (1.18) mm (")




10507793 Drilling tool holder

Fixation	W serration
Mounting	INDEX TRAUB CAPTO C4
Cooling	internal, p_{max} 80 bar
X / Y / Z	90 (3.54) / - / 7 (0.28) mm (")




10159006 Turning tool holder, Form C1/C4

Fixation	none
Mounting	square 20x20
Cooling	external, p_{max} 40 bar
X / Y / Z	70 (2.76) / - / 35 (1.38) mm (")




10473474 Turning tool holder, Form C2/C3

Fixation	none
Mounting	square 20x20
Cooling	external, p_{max} 40 bar
X / Y / Z	70 (2.76) / - / 41 (1.61) mm (")




10414972 Turning tool holder, double

Fixation	none
Mounting	square 25x25
Cooling	external, p_{max} 20 bar
X / Y / Z	64 (2.52) / - / 43 (1.69) mm (")




10663275 Turning tool holder, Form C1/C4

Fixation	none
Mounting	square 25x25
Cooling	external, p_{max} 40 bar
X / Y / Z	70 (2.76) / - / 40 (1.57) mm (")




10719601 Turning tool holder, Form C2/C3

Fixation	none
Mounting	square 25x25
Cooling	external, p_{max} 40 bar
X / Y / Z	70 (2.76) / - / 46 (1.81) mm (")




10836499 Turning tool holder

Fixation	none
Mounting	square 25x25
Cooling	external, p_{\max} 20 bar
X / Y / Z	90 (3.54) / - / 49 (1.93) mm (")




10335245 Turning tool holder, Form C1/C4

Fixation	W serration
Mounting	square 25x25
Cooling	external, p_{\max} 40 bar
X / Y / Z	60.6 (2.39) / - / 35 (1.38) mm (")




10446357 Turning tool holder, double

Fixation	W serration
Mounting	square 25x25
Cooling	external, p_{\max} 20 bar
X / Y / Z	62 (2.44) / - / 43 (1.69) mm (")




10765722 Turning tool holder, Form C2/C3

Fixation	W serration
Mounting	square 25x25
Cooling	external, p_{\max} 40 bar
X / Y / Z	60.6 (2.39) / - / 56 (2.20) mm (")




10510844 Turning tool holder

Fixation	none
Mounting	square 25x25
Cooling	external, p_{\max} 20 bar
X / Y / Z	60 (2.36) / - / 35 (1.38) mm (")




11059343 Turning tool holder

Fixation	none
Mounting	square 25x25
Cooling	external, p_{\max} 20 bar
X / Y / Z	60 (2.36) / - / 35 (1.38) mm (")




10037200 Turning tool holder

Fixation	Clamping and stop bar
Mounting	square 25x25
Cooling	external, p_{\max} 20 bar
X / Y / Z	60 (2.36) / - / 35 (1.38) mm (")




10909576 Turning tool holder

Fixation	Clamping and stop bar
Mounting	square 25x25
Cooling	external, p_{\max} 20 bar
X / Y / Z	60 (2.36) / - / 35 (1.38) mm (")




10287557 Turning tool holder

Fixation	W serration
Mounting	square 25x25
Cooling	external, p_{\max} 40 bar
X / Y / Z	86 (3.39) / - / 35 (1.38) mm (")




10151825 Grooving tool holder, Contour plunging tool holder

Fixation	W serration
Mounting	-
Cooling	external, p_{\max} 80 bar
X / Y / Z	90 (3.54) / - / 35 (1.38) mm (")




10089608 Basic holder

Fixation	none
Mounting	WFB 32-20
Cooling	internal, p_{\max} 80 bar
X / Y / Z	28 (1.10) / - / - mm (")




10774339 Basic holder, adjustable

Fixation	W serration
Mounting	-
Cooling	external, p_{\max} 20 bar
X / Y / Z	38 (1.50) / - / 32 (1.26) mm (")




10629246 Grooving tool holding block

Fixation	-
Mounting	Trapezoid 32x5
Cooling	external, p_{\max} 80 bar
X / Y / Z	87.5 (3.44) / - / 7 (0.28) mm (")




10139337 Grooving tool holding block

Fixation	-
Mounting	Trapezoid 32x8
Cooling	external, p_{\max} 80 bar
X / Y / Z	87.5 (3.44) / - / 7 (0.28) mm (")




10365096 Grooving tool holding block

Fixation	–
Mounting	Trapezoid 32x8
Cooling	external, p_{\max} 80 bar
X / Y / Z	107.5 (4.23) / – / 7 (0.28) mm (")




10513139 Grooving tool holding block

Fixation	–
Mounting	Trapezoid 32x8
Cooling	external, p_{\max} 80 bar
X / Y / Z	87.5 (3.44) / – / 15 (0.59) mm (")




10590575 Grooving tool holding block

Fixation	–
Mounting	Trapezoid 32x8
Cooling	external, p_{\max} 80 bar
X / Y / Z	87.5 (3.44) / – / 20 (0.79) mm (")




10453502 Grooving tool holding block

Fixation	–
Mounting	Trapezoid 32x8
Cooling	external, p_{\max} 80 bar
X / Y / Z	87.5 (3.44) / – / 20 (0.79) mm (")




10908238 Grooving tool holding block

Fixation	–
Mounting	Trapezoid 32x8
Cooling	external and internal, p_{\max} 80 bar
X / Y / Z	87.5 (3.44) / – / 20 (0.79) mm (")



10497315 Basic holder, vertically adjustable

Fixation	W serration
Mounting	–
Cooling	external, p_{\max} 80 bar
X / Y / Z	65 (2.56) / – / 3 (0.12) mm (")




10770991 Grooving tool holding block, vertically adjustable

Fixation	–
Mounting	square 16x16
Cooling	–
X / Y / Z	20 (0.79) / – / 17 (0.67) mm (")


Stationary tool holder Shank VDI30

INDEX TRAUB




11004141 Grooving tool holding block, vertically adjustable

Fixation	–
Mounting	square 16x16
Cooling	–
X / Y / Z	40 (1.57) / – / 40 (1.57) mm (")




10227285 Grooving tool holding block, vertically adjustable

Fixation	–
Mounting	Trapezoid 26x5
Cooling	–
X / Y / Z	20 (0.79) / – / 32 (1.26) mm (")




10049220 Grooving tool holding block, vertically adjustable

Fixation	–
Mounting	Trapezoid 26x5
Cooling	–
X / Y / Z	47.5 (1.87) / – / 32 (1.26) mm (")




10787914 Grooving tool holding block, vertically adjustable

Fixation	–
Mounting	Trapezoid 26x5
Cooling	–
X / Y / Z	47.5 (1.87) / – / 28.5 (1.12) mm (")




10410270 Grooving tool holding block, vertically adjustable

Fixation	–
Mounting	Trapezoid 26x5
Cooling	–
X / Y / Z	47.5 (1.87) / – / 32 (1.26) mm (")




10777825 Grooving tool holding block, vertically adjustable

Fixation	–
Mounting	Trapezoid 26x5
Cooling	–
X / Y / Z	47.5 (1.87) / – / 28.5 (1.12) mm (")




10069061 Center holder, vertically adjustable, spring-loaded

Fixation	W serration
Mounting	D15.4 (0.61 ") / Cone 1:7.5
Cooling	external, p_{\max} 20 bar
X / Y / Z	90 (3.54) / ± 0.5 (± 0.02) / 56.5 (2.22) mm (")




10376322 Center holder, vertically adjustable, not spring-loaded

Fixation	W serration
Mounting	D15.4 (0.61")/Cone 1:7.5
Cooling	external, p_{\max} 20 bar
X / Y / Z	90 (3.54) / ± 0.5 (± 0.02) / 56.5 (2.22) mm (")




10625279 Embossing roll holder

Fixation	none
Mounting	—
Cooling	internal, p_{\max} 20 bar
X / Y / Z	60 (2.36) / — / 42.5 (1.67) mm (")

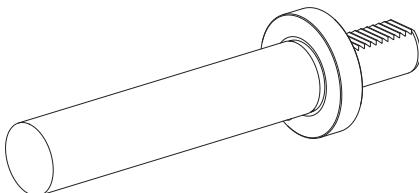


10869171 Calibrating tool

Fixation	—
Mounting	—
Cooling	—
X / Y / Z	200 (7.87) / — / — mm (")




10266154 Coolant nozzle

Fixation	none
Mounting	—
Cooling	external, p_{\max} 20 bar
X / Y / Z	30 (1.18) / — / — mm (")




10147524 Coolant nozzle

Fixation	—
Mounting	—
Cooling	external, p_{\max} 80 bar
X / Y / Z	25 (0.98) / — / — mm (")




10581081 Blanking plug

Fixation	—
Mounting	—
Cooling	—
X / Y / Z	15 (0.59) / — / — mm (")




10246015 Drilling unit, double

Fixation	W serration
Mounting	ER 16
Cooling	external, p_{\max} 40 bar
Speed ratio	1:2 (0.5)
X / Y / Z	78 (3.07) / ±25 (±0.98) / 30 (1.18) mm (")

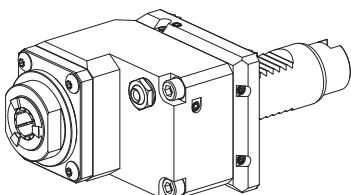


10117971 Drilling unit

Fixation	W serration
Mounting	ER 20
Cooling	external, p_{\max} 80 bar
Speed ratio	1:3 (0.333)
X / Y / Z	86.9 (3.42) / – / 35 (1.38) mm (")

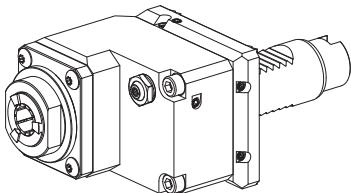


10904964 Drilling unit

Fixation	W serration
Mounting	ER 20
Cooling	external and internal, p_{\max} 80 bar
Speed ratio	1:3 (0.333)
X / Y / Z	86.9 (3.42) / – / 35 (1.38) mm (")

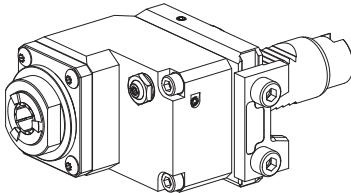


10488557 Drilling unit

Fixation	Vee bar
Mounting	ER 20
Cooling	external and internal, p_{\max} 80 bar
Speed ratio	1:3 (0.333)
X / Y / Z	90 (3.54) / – / 35 (1.38) mm (")

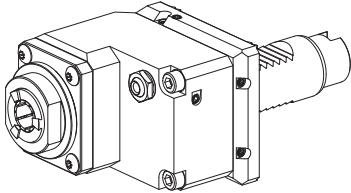


10128301 Drilling unit

Fixation	W serration
Mounting	ER 20
Cooling	external, p_{\max} 80 bar
Speed ratio	1:2 (0.5)
X / Y / Z	86.9 (3.42) / – / 35 (1.38) mm (")

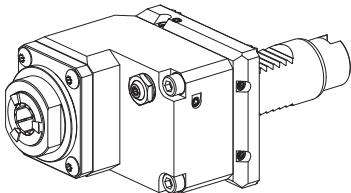


10689186 Drilling unit

Fixation	W serration
Mounting	ER 20
Cooling	external and internal, p_{\max} 80 bar
Speed ratio	1:2 (0.5)
X / Y / Z	86.9 (3.42) / – / 35 (1.38) mm (")

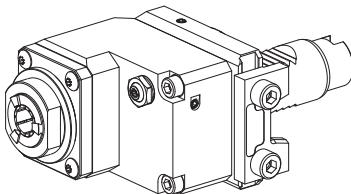


10920987 Drilling unit

Fixation	Vee bar
Mounting	ER 20
Cooling	external and internal, p_{\max} 80 bar
Speed ratio	1:2 (0.5)
X / Y / Z	90 (3.54) / – / 35 (1.38) mm (")

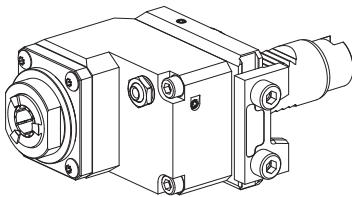


10946222 Drilling unit

Fixation	Vee bar
Mounting	ER 20
Cooling	external, p_{\max} 80 bar
Speed ratio	1:2 (0.5)
X / Y / Z	90 (3.54) / - / 35 (1.38) mm (")




10176967 Drilling unit

Fixation	none
Mounting	ER 25
Cooling	external, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	67 (2.64) / - / - mm (")




10239728 Drilling unit

Fixation	none
Mounting	ER 25
Cooling	internal, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	85 (3.35) / - / - mm (")




10485246 Drilling unit

Fixation	none
Mounting	ER 32
Cooling	external, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	71 (2.80) / - / - mm (")




10050083 Drilling unit

Fixation	none
Mounting	DIN 1835 B/E D20 (0.79 ")
Cooling	internal, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	89 (3.50) / - / - mm (")




10721391 Drilling unit, adjustable

Fixation	none
Mounting	D16 (0.63 ")
Cooling	external, p_{\max} 40 bar
Speed ratio	1:1 (1)
X / Y / Z	85 (3.35) / - / - mm (")

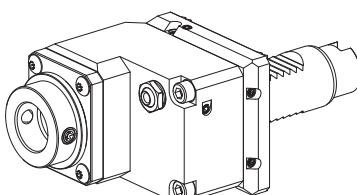


10769830 Drilling unit

Fixation	W serration
Mounting	WFB 24-16
Cooling	external, p_{\max} 80 bar
Speed ratio	1:3 (0.333)
X / Y / Z	90.4 (3.56) / - / 35 (1.38) mm (")

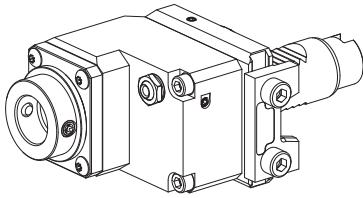


11005662 Drilling unit

Fixation	Vee bar
Mounting	WFB 24-16
Cooling	external, p_{\max} 80 bar
Speed ratio	1:3 (0.333)
X / Y / Z	93.5 (3.68) / - / 35 (1.38) mm (")




10488794 Drilling unit

Fixation	none
Mounting	WFB 32-20
Cooling	external, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	72 (2.83) / - / - mm (")




10692074 Milling unit

Fixation	none
Mounting	ER 25
Cooling	external, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	81 (3.19) / - / - mm (")

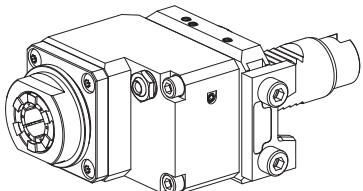


10679113 Milling unit

Fixation	Vee bar
Mounting	ER 25
Cooling	external, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	94 (3.70) / - / 31 (1.22) mm (")

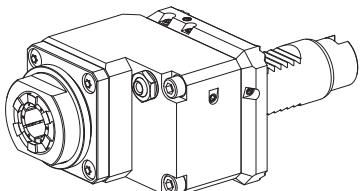


10881857 Milling unit

Fixation	W serration
Mounting	ER 25
Cooling	external, p_{\max} 80 bar
Speed ratio	2:1 (2)
X / Y / Z	90.9 (3.58) / - / 31 (1.22) mm (")

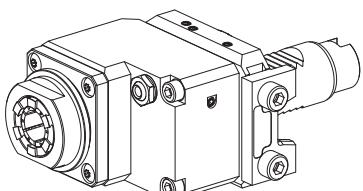


10545995 Milling unit

Fixation	Vee bar
Mounting	ER 25
Cooling	external, p_{\max} 80 bar
Speed ratio	2:1 (2)
X / Y / Z	94 (3.70) / - / 31 (1.22) mm (")

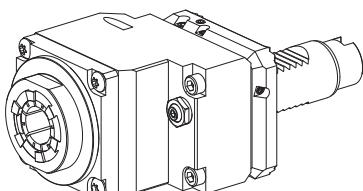


10059501 Milling unit

Fixation	W serration
Mounting	ER 32
Cooling	external and internal, p_{\max} 80 bar
Speed ratio	2:1 (2)
X / Y / Z	103.9 (4.09) / - / 31 (1.22) mm (")




10988958 Milling unit

Fixation	none
Mounting	DIN 1835 B/E D16 (0.63 ")
Cooling	external, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	86.5 (3.41) / - / - mm (")

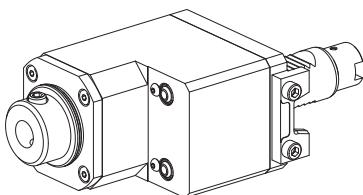


10801173 Milling unit

Fixation	Vee bar
Mounting	DIN 1835 B/E D16 (0.63 ")
Cooling	external, p_{\max} 20 bar
Speed ratio	2:1 (2)
X / Y / Z	136.5 (5.37) / - / 34 (1.34) mm (")




10657344 Milling unit

Fixation	none
Mounting	DIN 1835 B/E D20 (0.79 ")
Cooling	external, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	86.5 (3.41) / - / - mm (")

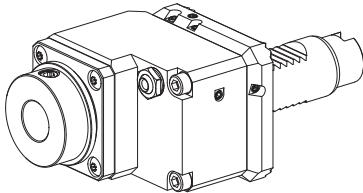


10299551 Milling unit

Fixation	W serration
Mounting	DIN 1835 B/E D20 (0.79 ")
Cooling	external, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	93.9 (3.70) / - / 31 (1.22) mm (")

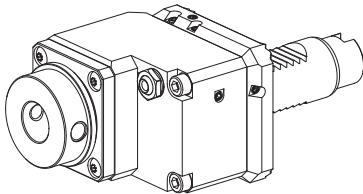


11060269 Milling unit

Fixation	W serration
Mounting	DIN 1835 B/E D20 (0.79 ")
Cooling	external, p_{\max} 80 bar
Speed ratio	2:1 (2)
X / Y / Z	93.9 (3.70) / - / 31 (1.22) mm (")

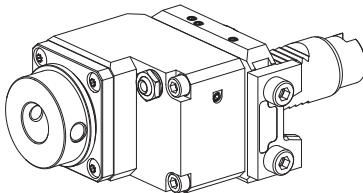


10136455 Milling unit

Fixation	Vee bar
Mounting	DIN 1835 B/E D20 (0.79 ")
Cooling	external, p_{\max} 80 bar
Speed ratio	2:1 (2)
X / Y / Z	97 (3.82) / - / 31 (1.22) mm (")




10207175 Milling unit

Fixation	none
Mounting	WFB 32-20
Cooling	external, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	86.5 (3.41) / - / - mm (")




10674524 Milling unit

Fixation	none
Mounting	Milling shaft D27 (1.06 ")
Cooling	external, p_{max} 40 bar
Speed ratio	4:1 (4)
X / Y / Z	94 (3.70) / - / - mm (")




10300695 Milling unit

Fixation	none
Mounting	INDEX TRAUB CAPTO C3
Cooling	external, p_{max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	76 (2.99) / - / 0 () mm (")




10659515 Milling unit

Fixation	W serration
Mounting	INDEX TRAUB CAPTO C3
Cooling	external, p_{max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	76 (2.99) / - / 0 () mm (")




10988881 Milling unit

Fixation	none
Mounting	-
Cooling	external, p_{max} 40 bar
Speed ratio	1:1 (1)
X / Y / Z	70.5 (2.78) / - / - mm (")




10670447 Milling cutter holding block

Fixation	-
Mounting	Milling shaft D13 (0.51 ")
Cooling	-
X / Y / Z	- / - / - mm (")




11041286 Milling cutter holding block

Fixation	-
Mounting	Milling shaft D16 (0.63 ")
Cooling	-
X / Y / Z	- / - / - mm (")




10435497 Milling cutter holding block

Fixation	-
Mounting	Milling shaft D22 (0.87 ")
Cooling	-
X / Y / Z	- / - / - mm (")




12011567 Milling cutter holding block

Fixation	–
Mounting	Milling shaft D22 (0.87 ")
Cooling	–
X / Y / Z	32.5 (1.28) / – / – mm (")




10807705 Milling cutter holding block

Fixation	–
Mounting	Milling shaft D27 (1.06 ")
Cooling	–
X / Y / Z	– / – / – mm (")




10223928 Milling cutter holding block

Fixation	–
Mounting	Milling shaft D32 (1.26 ")
Cooling	–
X / Y / Z	– / – / – mm (")




10062507 Tapping unit, extendable

Fixation	none
Mounting	ER 25
Cooling	external, p_{max} 40 bar
Speed ratio	1:1 (1)
X / Y / Z	84 (3.31) / – / – mm (")




10884623 Circular saw unit

Fixation	W serration
Mounting	D16 (0.63 ")
Cooling	external, p_{max} 80 bar
Speed ratio	3.12:1 (3.125)
X / Y / Z	90 (3.54) / – / – mm (")




10453576 Circular saw unit

Fixation	Vee bar
Mounting	D16 (0.63 ")
Cooling	external, p_{max} 80 bar
Speed ratio	3.12:1 (3.125)
X / Y / Z	90 (3.54) / – / – mm (")




10862253 Grinding unit

Fixation	none
Mounting	D22 (0.87 ")
Cooling	external, p_{max} 40 bar
Speed ratio	1:1 (1)
X / Y / Z	87 (3.43) / – / – mm (")

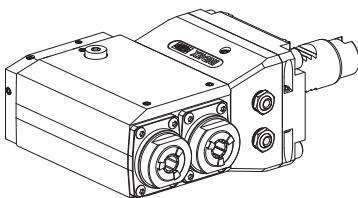


10840648 Drilling unit, double

Fixation	W serration
Mounting	ER 16
Cooling	external, p_{\max} 80 bar
Speed ratio	1:2 (0.5)
X / Y / Z	90 + 130 (3.54 + 5.19) / - / 71.3 (2.81) mm (")

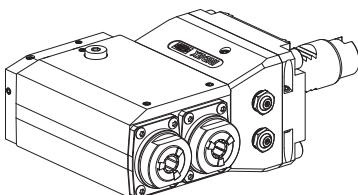


10960373 Drilling unit, double

Fixation	W serration
Mounting	ER 16
Cooling	internal, p_{\max} 80 bar
Speed ratio	1:2 (0.5)
X / Y / Z	90 + 130 (3.54 + 5.19) / - / 71.3 (2.81) mm (")




10590628 Drilling unit

Fixation	W serration
Mounting	ER 20
Cooling	external, internal optional, p_{\max} 80 bar
Speed ratio	1:3 (0.333)
X / Y / Z	90 (3.54) / - / 96 (3.78) mm (")




10353413 Drilling unit

Fixation	Vee bar
Mounting	ER 20
Cooling	external, internal optional, p_{\max} 80 bar
Speed ratio	1:3 (0.333)
X / Y / Z	90 (3.54) / - / 96 (3.78) mm (")




10569915 Drilling unit

Fixation	W serration
Mounting	ER 20
Cooling	external, internal optional, p_{\max} 80 bar
Speed ratio	1:2 (0.5)
X / Y / Z	90 (3.54) / - / 96 (3.78) mm (")




10841593 Drilling unit

Fixation	W serration
Mounting	DIN 1835 B/E D16 (0.63 ")
Cooling	external, internal optional, p_{\max} 80 bar
Speed ratio	1:3 (0.333)
X / Y / Z	90 (3.54) / - / 100 (3.94) mm (")




10842869 Drilling unit

Fixation	Vee bar
Mounting	DIN 1835 B/E D16 (0.63 ")
Cooling	external, internal optional, p_{\max} 80 bar
Speed ratio	1:3 (0.333)
X / Y / Z	90 (3.54) / - / 100 (3.94) mm (")




10832721 Drilling unit

Fixation	W serration
Mounting	DIN 1835 B/E D16 (0.63 ")
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	1:2 (0.5)
X / Y / Z	90 (3.54) / - / 100 (3.94) mm (")




10212431 Drilling unit, vertically adjustable

Fixation	W serration
Mounting	DIN 1835 B/E D16 (0.63 ")
Cooling	internal, p_{max} 80 bar
Speed ratio	1:1.77 (0.565)
X / Y / Z	90 (3.54) / - / 97 (3.82) mm (")




10069992 Drilling unit

Fixation	W serration
Mounting	WFB 24-16
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	1:3 (0.333)
X / Y / Z	90 (3.54) / - / 98 (3.86) mm (")




10531101 Drilling unit

Fixation	Vee bar
Mounting	WFB 24-16
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	1:3 (0.333)
X / Y / Z	90 (3.54) / - / 98 (3.86) mm (")




10412797 Drilling unit

Fixation	W serration
Mounting	WFB 24-16
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	1:2 (0.5)
X / Y / Z	90 (3.54) / - / 98 (3.86) mm (")




10639523 Drilling unit

Fixation	Vee bar
Mounting	WFB 24-16
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	1:2 (0.5)
X / Y / Z	90 (3.54) / - / 98 (3.86) mm (")

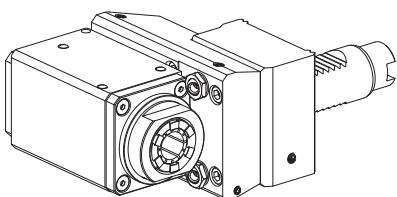


10005333 Milling unit, shifted

Fixation	W serration
Mounting	ER 25
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	90 (3.54) / - / 22 (0.87) mm (")




10571448 Milling unit

Fixation	W serration
Mounting	ER 25
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	90 (3.54) / - / 84 (3.31) mm (")




10193158 Milling unit

Fixation	W serration
Mounting	ER 25
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	2:1 (2)
X / Y / Z	90 (3.54) / - / 84 (3.31) mm (")




10288165 Milling unit

Fixation	W serration
Mounting	ER 25 PRECI-FLEX
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	2:1 (2)
X / Y / Z	90 (3.54) / - / 89 (3.50) mm (")




10202810 Milling unit

Fixation	W serration
Mounting	DIN 1835 B/E D20 (0.79 ")
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	90 (3.54) / - / 93 (3.66) mm (")




10011322 Milling unit

Fixation	W serration
Mounting	DIN 1835 B/E D20 (0.79 ")
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	2:1 (2)
X / Y / Z	90 (3.54) / - / 93 (3.66) mm (")




10382907 Milling unit

Fixation	W serration
Mounting	WFB 32-20
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	90 (3.54) / - / 92 (3.62) mm (")




10194154 Milling unit

Fixation	W serration
Mounting	WFB 32-20
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	2:1 (2)
X / Y / Z	90 (3.54) / - / 92 (3.62) mm (")




10406968 Milling unit

Fixation	W serration
Mounting	Milling shaft D22 (0.87 ")
Cooling	external, p_{\max} 80 bar
Speed ratio	2.36:1 (2.36)
X / Y / Z	80 (3.15) / - / 40 (1.57) mm (")




10068882 Milling unit

Fixation	W serration
Mounting	INDEX TRAUB CAPTO C3
Cooling	external, internal optional, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	90 (3.54) / - / 53.5 (2.11) mm (")




10670514 Milling unit

Fixation	Vee bar
Mounting	INDEX TRAUB CAPTO C3
Cooling	external, internal optional, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	90 (3.54) / - / 53.5 (2.11) mm (")




11168383 Milling unit

Fixation	W serration
Mounting	-
Cooling	external, p_{\max} 80 bar
Speed ratio	2:1 (2)
X / Y / Z	90 (3.54) / - / 84 (3.31) mm (")




10670447 Milling cutter holding block

Fixation	-
Mounting	Milling shaft D13 (0.51 ")
Cooling	-
X / Y / Z	- / - / - mm (")




11041286 Milling cutter holding block

Fixation	-
Mounting	Milling shaft D16 (0.63 ")
Cooling	-
X / Y / Z	- / - / - mm (")




10435497 Milling cutter holding block

Fixation	-
Mounting	Milling shaft D22 (0.87 ")
Cooling	-
X / Y / Z	- / - / - mm (")




12011567 Milling cutter holding block

Fixation	–
Mounting	Milling shaft D22 (0.87 ")
Cooling	–
X / Y / Z	32.5 (1.28) / – / – mm (")




10807705 Milling cutter holding block

Fixation	–
Mounting	Milling shaft D27 (1.06 ")
Cooling	–
X / Y / Z	– / – / – mm (")




10223928 Milling cutter holding block

Fixation	–
Mounting	Milling shaft D32 (1.26 ")
Cooling	–
X / Y / Z	– / – / – mm (")




10620051 Drilling unit, angle-adjustable

Fixation	W serration
Mounting	ER 16
Cooling	external, p_{\max} 40 bar
Speed ratio	1:1 (1)
X / Y / Z	65 (2.56) / – / – mm (")




10402344 Drilling unit, angle-adjustable

Fixation	W serration
Mounting	ER 20
Cooling	internal, p_{\max} 80 bar
Speed ratio	1:1.69 (0.59)
X / Y / Z	90 (3.54) / – / – mm (")




10428174 Bar stop, adjustable, live

Fixation	none
Mounting	–
Cooling	–
X / Y / Z	60 - 97 (2.36 - 3.82) / – / – mm (")




10679593 Bar stop, adjustable, live

Fixation	none
Mounting	–
Cooling	–
X / Y / Z	60 - 97 (2.36 - 3.82) / – / – mm (")




10424888 Drilling tool holder, Form E4

Fixation	none
Mounting	ER 25
Cooling	internal, p_{max} 80 bar
X / Y / Z	68 (2.68) / – / – mm (")




10453838 Drilling tool holder, Form E4

Fixation	none
Mounting	ER 32
Cooling	internal, p_{max} 20 bar
X / Y / Z	76 (2.99) / – / – mm (")




10239645 Drilling tool holder, Form E4

Fixation	none
Mounting	ER 40
Cooling	internal, p_{max} 80 bar
X / Y / Z	80 (3.15) / – / – mm (")




10502799 Drilling tool holder, Form E1

Fixation	none
Mounting	DIN 1835 E D20 (0.79 ")
Cooling	internal, p_{max} 80 bar
X / Y / Z	67 (2.64) / – / – mm (")




10659026 Drilling tool holder, Form E1

Fixation	none
Mounting	DIN 1835 E D25 (0.98 ")
Cooling	internal, p_{max} 80 bar
X / Y / Z	71 (2.80) / – / – mm (")




10168049 Drilling tool holder, Form E2

Fixation	none
Mounting	D8 (0.31 ")
Cooling	external and internal, p_{max} 20 bar
X / Y / Z	60 (2.36) / - / - mm (")




10364335 Drilling tool holder, Form E2

Fixation	none
Mounting	D10 (0.39 ")
Cooling	external and internal, p_{max} 20 bar
X / Y / Z	60 (2.36) / - / - mm (")




10240059 Drilling tool holder, Form E2

Fixation	none
Mounting	D12 (0.47 ")
Cooling	external and internal, p_{max} 20 bar
X / Y / Z	60 (2.36) / - / - mm (")




11043672 Drilling tool holder, Specially for the marking tool WriteStar

Fixation	none
Mounting	D12 (0.47 ")
Cooling	-
X / Y / Z	68 (2.68) / - / - mm (")




10298106 Drilling tool holder, Form E2

Fixation	none
Mounting	D16 (0.63 ")
Cooling	external and internal, p_{max} 20 bar
X / Y / Z	60 (2.36) / - / - mm (")




10806859 Drilling tool holder, Form E2

Fixation	none
Mounting	D20 (0.79 ")
Cooling	external and internal, p_{max} 20 bar
X / Y / Z	60 (2.36) / - / - mm (")




10040148 Drilling tool holder

Fixation	none
Mounting	D25 (0.98 ")
Cooling	external and internal, p_{max} 40 bar
X / Y / Z	45 (1.77) / - / - mm (")




10175060 Drilling tool holder, Form E2

Fixation	none
Mounting	D25 (0.98 ")
Cooling	external and internal, p_{max} 20 bar
X / Y / Z	60 (2.36) / - / - mm (")




10601688 Drilling tool holder

Fixation	none
Mounting	D32 (1.26 ")
Cooling	internal, p_{max} 80 bar
X / Y / Z	73 (2.87) / - / - mm (")




11055569 Drilling tool holder, Form E2

Fixation	none
Mounting	D32 (1.26 ")
Cooling	external, p_{max} 20 bar
X / Y / Z	70 (2.76) / - / - mm (")




10631335 Drilling tool holder

Fixation	none
Mounting	MK1
Cooling	external, p_{max} 20 bar
X / Y / Z	30 (1.18) / - / - mm (")




10550804 Drilling tool holder

Fixation	none
Mounting	MK2
Cooling	external, p_{max} 20 bar
X / Y / Z	27 (1.06) / - / - mm (")




10677499 Drilling tool holder

Fixation	none
Mounting	MK3
Cooling	external, p_{max} 20 bar
X / Y / Z	45 (1.77) / - / - mm (")




10921732 Compensation bushing

Fixation	none
Mounting	D3/4"
Cooling	-
X / Y / Z	6 (0.24) / - / - mm (")




11033529 Compensation bushing

Fixation	none
Mounting	D1"
Cooling	–
X / Y / Z	6 (0.24) / – / – mm (")




10217247 Basic holder, vertically adjustable

Fixation	none
Mounting	–
Cooling	external, p_{\max} 20 bar
X / Y / Z	14 (0.55) / – / – mm (")




10374519 Drill holding block

Fixation	–
Mounting	ER 25
Cooling	–, p_{\max} 40 bar
X / Y / Z	30 (1.18) / – / – mm (")




10193528 Drill holding block

Fixation	–
Mounting	D32 (1.26 ")
Cooling	–, p_{\max} 40 bar
X / Y / Z	57 (2.24) / – / – mm (")




10387522 Center holder, elastic, live

Fixation	none
Mounting	D15.4 (0.61 ")/Cone 1:7.5
Cooling	–
X / Y / Z	68.5 (2.70) / – / – mm (")




10593935 Center holder, live

Fixation	none
Mounting	D15.4 (0.61 ")/Cone 1:7.5
Cooling	–
X / Y / Z	69.5 (2.74) / – / – mm (")




10301384 Tapping tool holder, extendable

Fixation	none
Mounting	D25 (0.98 ")
Cooling	external, p_{\max} 20 bar
X / Y / Z	73 (2.87) / – / – mm (")




10894326 Reaming tool holder, adjustable

Fixation none
Mounting ER 25
Cooling external, p_{\max} 20 bar
X / Y / Z 73.5 (2.89) / - / - mm (")




11041243 Reaming tool holder, adjustable

Fixation none
Mounting D18 (0.71 ")
Cooling external, p_{\max} 20 bar
X / Y / Z 59 (2.32) / - / - mm (")




10459517 Reaming tool holder, self-centering

Fixation none
Mounting D20 (0.79 ")
Cooling internal, p_{\max} 40 bar
X / Y / Z 93 (3.66) / - / - mm (")




10929722 Broaching/ Slotting holder, rotating, live

Fixation none
Mounting D12 (0.47 ")
Cooling external, p_{\max} 20 bar
X / Y / Z 60 (2.36) / - / - mm (")




11005033 Drilling tool holder, Form E4

Fixation	none
Mounting	ER 32
Cooling	internal, p_{\max} 40 bar
X / Y / Z	85 (3.35) / - / - mm (")




10818472 Drilling tool holder, Form E4

Fixation	none
Mounting	ER 40
Cooling	internal, p_{\max} 20 bar
X / Y / Z	80 (3.15) / - / - mm (")




10683918 Drilling tool holder, Form E1

Fixation	none
Mounting	DIN 1835 B/E D16 (0.63 ")
Cooling	internal, p_{\max} 40 bar
X / Y / Z	67 (2.64) / - / - mm (")




10295079 Drilling tool holder, Form E1

Fixation	none
Mounting	DIN 1835 B/E D20 (0.79 ")
Cooling	internal, p_{\max} 40 bar
X / Y / Z	67 (2.64) / - / - mm (")




10195001 Drilling tool holder, Form E1

Fixation	none
Mounting	DIN 1835 B/E D25 (0.98 ")
Cooling	internal, p_{\max} 40 bar
X / Y / Z	75 (2.95) / - / - mm (")




10944270 Drilling tool holder, Form E1

Fixation	none
Mounting	DIN 1835 B/E D32 (1.26 ")
Cooling	internal, p_{\max} 40 bar
X / Y / Z	75 (2.95) / - / - mm (")




10792184 Drilling tool holder, Form E1

Fixation	none
Mounting	DIN 1835 B/E D40 (1.57 ")
Cooling	internal, p_{\max} 40 bar
X / Y / Z	90 (3.54) / - / - mm (")




10666791 Drilling tool holder, Specially for the marking tool WriteStar

Fixation	none
Mounting	D12 (0.47 ")
Cooling	–
X / Y / Z	68 (2.68) / – / – mm (")




10046170 Drilling tool holder, Form E2

Fixation	none
Mounting	D40 (1.57 ")
Cooling	external, p _{max} 20 bar
X / Y / Z	85 (3.35) / – / – mm (")




10163321 Drilling tool holder

Fixation	none
Mounting	D40 (1.57 ")
Cooling	external, p _{max} 20 bar
X / Y / Z	85 (3.35) / – / – mm (")




11013124 Drilling tool holder

Fixation	none
Mounting	D40 (1.57 ")
Cooling	external, p _{max} 20 bar
X / Y / Z	85 (3.35) / – / 10 (0.39) mm (")




10004799 Drilling tool holder

Fixation	none
Mounting	D50 (1.97 ")
Cooling	external, p _{max} 20 bar
X / Y / Z	125 (4.92) / – / – mm (")




10268157 Drilling tool holder

Fixation	none
Mounting	MK2
Cooling	internal, p _{max} 20 bar
X / Y / Z	36 (1.42) / – / – mm (")




10943551 Drilling tool holder

Fixation	none
Mounting	MK3
Cooling	internal, p _{max} 20 bar
X / Y / Z	36 (1.42) / – / – mm (")




10502684 Drilling tool holder

Fixation	none
Mounting	MK4
Cooling	internal, p_{\max} 20 bar
X / Y / Z	80 (3.15) / - / - mm (")



10708899 Center holder, live

Fixation	none
Mounting	D15.4 (0.61")/Cone 1:7.5
Cooling	-
X / Y / Z	65 (2.56) / - / - mm (")



10792376 Reaming tool holder, adjustable

Fixation	none
Mounting	DIN 1835 B/E D20 (0.79")
Cooling	internal, p_{\max} 40 bar
X / Y / Z	78 (3.07) / - / - mm (")

INDEX **TRAUB**



DIW043EN - 20087343 04.18 Printed in Germany Subject to change without prior notice

**INDEX-Werke GmbH & Co. KG
Hahn & Tessky**

Plochinger Straße 92
D-73730 Esslingen

Fon +49 711 3191-0
Fax +49 711 3191-587

info@index-werke.de
www.index-werke.de