

INDEX

TRAUB



INDEX G420

Tool holder

Overview

Note on applicability


Illustrations in this publication may deviate from the product supplied. Errors and omissions due to technical progress expected.

A word on copyright

This document is protected by copyright and was originally compiled in German.


The duplication and distribution of this document or parts thereof is prohibited without prior consent of the copyright owner, and any violators will be prosecuted. All rights, including the right to translate, are reserved.

© Copyright by INDEX-Werke GmbH & Co. KG

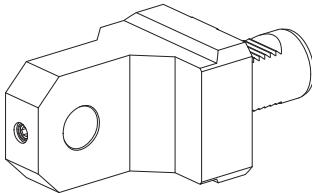


10875475 Bar stop, live

Fixation	none
Mounting	D25 (0.98 ")
Cooling	–
X / Y / Z	90 (3.54) / – / 1 (0.04) mm (")




10900227 Bar stop, live

Fixation	–
Mounting	D58 (2.28 ")
Cooling	–
X / Y / Z	– / – / 30 (1.18) mm (")




10452051 Bar stop, live

Fixation	–
Mounting	D85 (3.35 ")
Cooling	–
X / Y / Z	– / – / 30 (1.18) mm (")

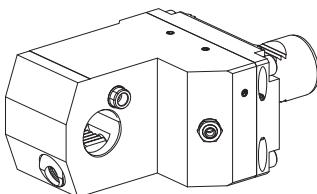


121103053 Compensation holder

Fixation	W serration
Mounting	VDI 30
Cooling	external and internal, p _{max} 80 bar
X / Y / Z	110 (4.33) / – / 10 (0.39) mm (")

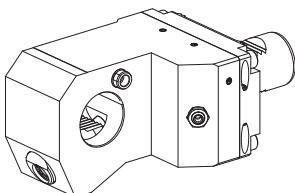


12089680 Compensation holder

Fixation	W serration
Mounting	VDI 40
Cooling	external and internal, p _{max} 80 bar
X / Y / Z	110 (4.33) / – / 10 (0.39) mm (")




11005033 Drilling tool holder, Form E4

Fixation	none
Mounting	ER 32
Cooling	internal, p _{max} 40 bar
X / Y / Z	85 (3.35) / – / – mm (")

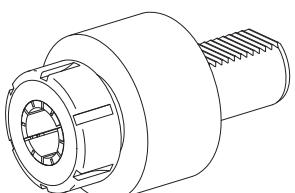


10818472 Drilling tool holder, Form E4

Fixation	none
Mounting	ER 40
Cooling	internal, p _{max} 20 bar
X / Y / Z	80 (3.15) / – / – mm (")

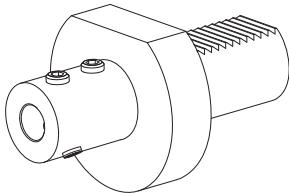


10683918 Drilling tool holder, Form E1

Fixation	none
Mounting	DIN 1835 B/E D16 (0.63 ")
Cooling	internal, p_{\max} 40 bar
X / Y / Z	67 (2.64) / - / - mm (")

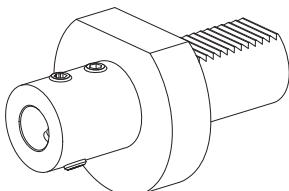


10295079 Drilling tool holder, Form E1

Fixation	none
Mounting	DIN 1835 B/E D20 (0.79 ")
Cooling	internal, p_{\max} 40 bar
X / Y / Z	67 (2.64) / - / - mm (")

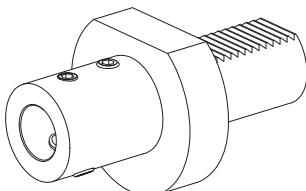


10195001 Drilling tool holder, Form E1

Fixation	none
Mounting	DIN 1835 B/E D25 (0.98 ")
Cooling	internal, p_{\max} 40 bar
X / Y / Z	75 (2.95) / - / - mm (")

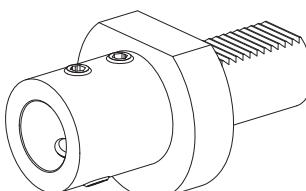


10944270 Drilling tool holder, Form E1

Fixation	none
Mounting	DIN 1835 B/E D32 (1.26 ")
Cooling	internal, p_{\max} 40 bar
X / Y / Z	75 (2.95) / - / - mm (")

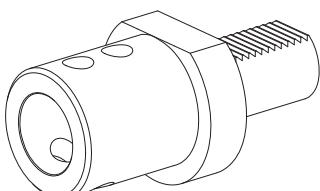


10792184 Drilling tool holder, Form E1

Fixation	none
Mounting	DIN 1835 B/E D40 (1.57 ")
Cooling	internal, p_{\max} 40 bar
X / Y / Z	90 (3.54) / - / - mm (")




10666791 Drilling tool holder, Specially for the marking tool WriteStar

Fixation	none
Mounting	D12 (0.47 ")
Cooling	-
X / Y / Z	68 (2.68) / - / - mm (")

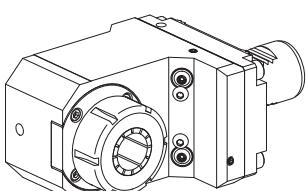


10829165 Drilling tool holder

Fixation	W serration
Mounting	ER 40
Cooling	external, p_{\max} 20 bar
X / Y / Z	110 (4.33) / - / 49 (1.93) mm (")

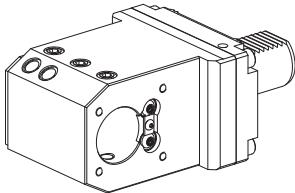


10909347 Drilling tool holder

Fixation	W serration
Mounting	DIN 1835 B/E D40 (1.57 ")
Cooling	external and internal, p_{max} 40 bar
X / Y / Z	110 (4.33) / - / 42.5 (1.67) mm (")

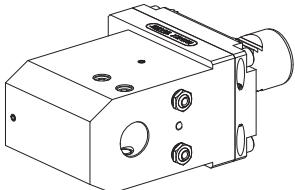


12026397 Drilling tool holder

Fixation	W serration
Mounting	D25 (0.98 ")
Cooling	external and internal, p_{max} 80 bar
X / Y / Z	110 (4.33) / - / 57.5 (2.26) mm (")

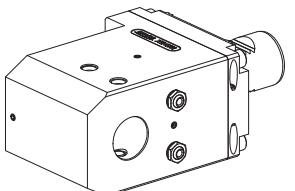


12026368 Drilling tool holder

Fixation	W serration
Mounting	D32 (1.26 ")
Cooling	external and internal, p_{max} 80 bar
X / Y / Z	110 (4.33) / - / 57.5 (2.26) mm (")

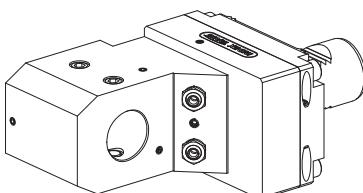


12036278 Drilling tool holder

Fixation	W serration
Mounting	D32 (1.26 ")
Cooling	external and internal, p_{max} 80 bar
X / Y / Z	110 (4.33) / - / - mm (")




12100635 Drilling tool holder

Fixation	W serration
Mounting	D32 (1.26 ")
Cooling	external, p_{max} 80 bar
X / Y / Z	110 (4.33) / 40 (1.57) / 60 (2.36) mm (")

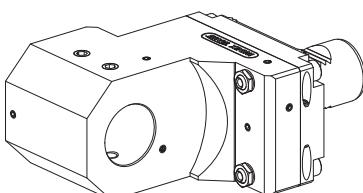


12102981 Drilling tool holder

Fixation	W serration
Mounting	D40 (1.57 ")
Cooling	external and internal, p_{max} 80 bar
X / Y / Z	110 (4.33) / - / 0 () mm (")




10810887 Turning tool holder, Form C2/C3

Fixation	none
Mounting	square 25x25
Cooling	external, p_{max} 20 bar
X / Y / Z	85 (3.35) / - / 47.5 (1.87) mm (")




10883332 Turning tool holder, double

Fixation	none
Mounting	square 25x25
Cooling	external, p_{\max} 20 bar
X / Y / Z	85 (3.35) / - / 47.5 (1.87) mm (")




10965815 Turning tool holder, Form C1/C4

Fixation	none
Mounting	square 25x25
Cooling	external, p_{\max} 20 bar
X / Y / Z	85 (3.35) / - / 42.5 (1.67) mm (")




10105290 Turning tool holder, double

Fixation	W serration
Mounting	square 25x25
Cooling	external, p_{\max} 20 bar
X / Y / Z	85 (3.35) / - / 47.5 (1.87) mm (")




12077312 Turning tool holder, Form C1/C4

Fixation	W serration
Mounting	square 25x25
Cooling	external and internal, p_{\max} 80 bar
X / Y / Z	60.6 (2.39) / - / 47.5 (1.87) mm (")




12098663 Turning tool holder, Form C2/C3

Fixation	W serration
Mounting	square 25x25
Cooling	external and internal, p_{\max} 80 bar
X / Y / Z	60.6 (2.39) / - / 47.5 (1.87) mm (")




12101123 Turning tool holder, double

Fixation	W serration
Mounting	square 25x25
Cooling	external and internal, p_{\max} 80 bar
X / Y / Z	90 (3.54) // 50 (1.97) mm (")




12118247 Turning tool holder, Form C1/C4

Fixation	W serration
Mounting	square 25x25
Cooling	external and internal, p_{\max} 80 bar
X / Y / Z	85 (3.35) / - / 47.5 (1.87) mm (")




12118264 Turning tool holder, Form C2/C3

Fixation	W serration
Mounting	square 25x25
Cooling	external and internal, p_{max} 80 bar
X / Y / Z	85 (3.35) / - / 47.5 (1.87) mm (")




10011449 Turning tool holder, Form C1/C4

Fixation	none
Mounting	square 32x32
Cooling	external, p_{max} 20 bar
X / Y / Z	80 (3.15) / - / 51.5 (2.03) mm (")




10730998 Turning tool holder, Form C2/C3

Fixation	none
Mounting	square 32x32
Cooling	external, p_{max} 20 bar
X / Y / Z	83 (3.27) / - / 51.5 (2.03) mm (")




10107867 Turning tool holder, Form C1/C4

Fixation	W serration
Mounting	square 32x32
Cooling	external, p_{max} 20 bar
X / Y / Z	80.6 (3.17) / - / 51.5 (2.03) mm (")




10521839 Turning tool holder, Form C2/C3

Fixation	W serration
Mounting	square 32x32
Cooling	external, p_{max} 20 bar
X / Y / Z	80.6 (3.17) / - / 51.5 (2.03) mm (")




10547558 Turning tool holder

Fixation	W serration
Mounting	square 25x25
Cooling	external, p_{max} 20 bar
X / Y / Z	105 (4.13) / - / 42.5 (1.67) mm (")




12099012 Turning tool holder, Form B1/B4

Fixation	W serration
Mounting	square 25x25
Cooling	external and internal, p_{max} 80 bar
X / Y / Z	44 (1.73) / - / 40 (1.57) mm (")




12099018 Turning tool holder, Form B1/B4

Fixation	W serration
Mounting	square 32x32
Cooling	external, p_{max} 80 bar
X / Y / Z	56 (2.20) / - / 40 (1.57) mm (")




12099020 Turning tool holder, Form B1/B4

Fixation	W serration
Mounting	square 32x32
Cooling	external, p_{max} 80 bar
X / Y / Z	105 (4.13) / - / 40 (1.57) mm (")



10781727 Basic holder

Fixation	W serration
Mounting	INDEX TRAUB CAPTO C5
Cooling	internal, p_{max} 80 bar
X / Y / Z	75 (2.95) / - / 20 (0.79) mm (")




10846334 Basic holder, vertically adjustable

Fixation	W serration
Mounting	-
Cooling	internal
X / Y / Z	17 (0.67) / - / 34.8 (1.37) mm (")




10011884 Grooving tool holding block

Fixation	-
Mounting	Trapezoid 32x4
Cooling	internal, p_{max} 80 bar
X / Y / Z	87.5 (3.44) / - / 6.5 (0.26) mm (")




10453502 Grooving tool holding block

Fixation	-
Mounting	Trapezoid 32x4
Cooling	external, p_{max} 80 bar
X / Y / Z	87.5 (3.44) / - / 20 (0.79) mm (")




10890955 Grooving tool holding block

Fixation	-
Mounting	Trapezoid 32x4
Cooling	external and internal, p_{max} 80 bar
X / Y / Z	87.5 (3.44) / - / 15 (0.59) mm (")




10908238 Grooving tool holding block

Fixation	–
Mounting	Trapezoid 32x4
Cooling	external and internal, p_{max} 80 bar
X / Y / Z	87.5 (3.44) / – / 20 (0.79) mm (")




10629246 Grooving tool holding block

Fixation	–
Mounting	Trapezoid 32x5
Cooling	external, p_{max} 80 bar
X / Y / Z	87.5 (3.44) / – / 7 (0.28) mm (")




10139337 Grooving tool holding block

Fixation	–
Mounting	Trapezoid 32x8
Cooling	external, p_{max} 80 bar
X / Y / Z	87.5 (3.44) / – / 7 (0.28) mm (")




10513139 Grooving tool holding block

Fixation	–
Mounting	Trapezoid 32x8
Cooling	external, p_{max} 80 bar
X / Y / Z	87.5 (3.44) / – / 15 (0.59) mm (")




10694590 Grooving tool holding block

Fixation	–
Mounting	Trapezoid 32x8
Cooling	external and internal, p_{max} 80 bar
X / Y / Z	87.5 (3.44) / – / 7 (0.28) mm (")




12092672 Grooving tool holding block

Fixation	–
Mounting	Trapezoid 32x8
Cooling	external and internal, p_{max} 80 bar
X / Y / Z	87.5 (3.44) / – / 20 (0.79) mm (")




12092674 Grooving tool holding block

Fixation	–
Mounting	Trapezoid 32x8
Cooling	external and internal, p_{max} 80 bar
X / Y / Z	107.5 (4.23) / – / 7 (0.28) mm (")




10351552 Basic holder

Fixation	W serration
Mounting	INDEX TRAUB CAPTO C5
Cooling	internal, p_{max} 80 bar
X / Y / Z	110 (4.33) / - / 20 (0.79) mm (")




10708899 Center holder, live

Fixation	none
Mounting	D15.4 (0.61")/Cone 1:7.5
Cooling	-
X / Y / Z	65 (2.56) / - / - mm (")




12029589 Probe holder

Fixation	W serration
Mounting	-
Cooling	-
X / Y / Z	108 (4.25) / 21.5 (0.85) / 39 (1.54) mm (")




10363269 Workpiece holder, adjustable

Fixation	none
Mounting	D30-200 (2.01"-7.60")
Cooling	-
X / Y / Z	115.5 (4.55) / - / - mm (")




10241951 Coolant nozzle

Fixation	none
Mounting	-
Cooling	external, p_{max} 40 bar
X / Y / Z	15 (0.59) / - / - mm (")




10410109 Coolant nozzle

Fixation	none
Mounting	-
Cooling	external, p_{max} 80 bar
X / Y / Z	25 (0.98) / - / - mm (")




10911003 Blanking plug

Fixation	none
Mounting	-
Cooling	-
X / Y / Z	10 (0.39) / - / - mm (")




10573819 Blanking plug

Fixation	–
Mounting	–
Cooling	–
X / Y / Z	10 (0.39) / – / – mm ("")




12118507 Tool holder blank

Fixation	W serration
Mounting	–
Cooling	–
X / Y / Z	140 (5.51) / – / – mm ("")




10806502 Drilling unit

Fixation	W serration
Mounting	ER 20
Cooling	external and internal, p_{max} 80 bar
Speed ratio	1:2 (0.5)
X / Y / Z	92 (3.62) / - / 35 (1.38) mm (")




10015358 Drilling unit

Fixation	none
Mounting	ER 25
Cooling	internal, p_{max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	86 (3.39) / - / - mm (")




12027363 Drilling unit

Fixation	none
Mounting	ER 25
Cooling	external, p_{max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	/ - / - mm (")




10689484 Drilling unit

Fixation	none
Mounting	DIN 1835 B/E D20 (0.79 ")
Cooling	external, p_{max} 40 bar
Speed ratio	1:1 (1)
X / Y / Z	67 (2.64) / - / - mm (")




12030161 Milling unit

Fixation	W serration
Mounting	ER 25
Cooling	external, p_{max} 80 bar
Speed ratio	1:2 (0.5)
X / Y / Z	99 (3.9) / - / 43 (1.69) mm (")




12030959 Milling unit

Fixation	W serration
Mounting	ER 25
Cooling	internal, p_{max} 80 bar
Speed ratio	1:2 (0.5)
X / Y / Z	99 (3.9) / - / 43 (1.69) mm (")




12029035 Milling unit

Fixation	none
Mounting	ER 25
Cooling	external, p_{max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	76 (2.99) / - / - mm (")




12088208 Milling unit

Fixation	none
Mounting	ER 32
Cooling	external, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	82 (3.23) / - / - mm (")




12038383 Milling unit

Fixation	W serration
Mounting	ER 32
Cooling	internal, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	114.5 (4.51) / - / 46 (1.81) mm (")




12038387 Milling unit

Fixation	W serration
Mounting	ER 32
Cooling	external, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	114.5 (4.51) / - / 46 (1.81) mm (")




12037366 Milling unit

Fixation	W serration
Mounting	ER 32
Cooling	internal, p_{\max} 80 bar
Speed ratio	2:1 (2)
X / Y / Z	114.5 (4.51) / - / 46 (1.81) mm (")




12038379 Milling unit

Fixation	W serration
Mounting	ER 32
Cooling	external, p_{\max} 80 bar
Speed ratio	2:1 (2)
X / Y / Z	114.5 (4.51) / - / 46 (1.81) mm (")




12029031 Milling unit

Fixation	none
Mounting	D25 (0.98 ")
Cooling	external, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	85 (3.35) / - / - mm (")




12028521 Milling unit

Fixation	none
Mounting	D32 (1.26 ")
Cooling	external, p_{\max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	85 (3.35) / - / - mm (")




10555168 Drilling unit

Fixation	W serration
Mounting	ER 20
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	1:3 (0.333)
X / Y / Z	110 (4.33) / - / 96 (3.78) mm (")




10394693 Drilling unit

Fixation	W serration
Mounting	ER 25
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	1:2 (0.5)
X / Y / Z	110 (4.33) / - / 97 (3.82) mm (")




12033177 Milling unit

Fixation	W serration
Mounting	ER 32
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	110 (4.33) / - / 93.5 (3.68) mm (")

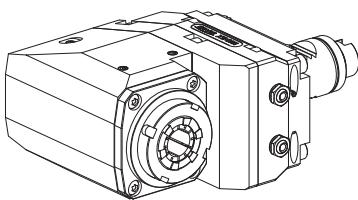


12042168 Milling unit

Fixation	W serration
Mounting	ER 32
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	110 (4.33) / - / 49.5 (1.95) mm (")




10788622 Milling unit

Fixation	W serration
Mounting	ER 32
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	2:1 (2)
X / Y / Z	110 (4.33) / - / 93.5 (3.68) mm (")

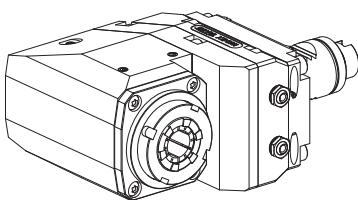


12042169 Milling unit

Fixation	W serration
Mounting	ER 32
Cooling	external, p_{max} 80 bar
Speed ratio	2:1 (2)
X / Y / Z	110 (4.33) / - / 49.5 (1.95) mm (")




10744754 Milling unit

Fixation	W serration
Mounting	ER 40
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	110 (4.33) / - / mm (")




12033082 Milling unit

Fixation	W serration
Mounting	ER 40
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	2:1 (2)
X / Y / Z	110 (4.33) / - / mm (")




12032576 Milling unit

Fixation	W serration
Mounting	D32 (1.26 ")
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	1:1 (1)
X / Y / Z	110 (4.33) / - / 100 (3.94) mm (")




12032524 Milling unit

Fixation	W serration
Mounting	D32 (1.26 ")
Cooling	external, internal optional, p_{max} 80 bar
Speed ratio	2:1 (2)
X / Y / Z	110 (4.33) / - / 100 (3.94) mm (")



10978445 Drilling unit, angle-adjustable

Fixation	W serration
Mounting	ER 16
Cooling	external, p_{max} 40 bar
Speed ratio	1:1 (1)
X / Y / Z	65 (2.56) / - / - mm (")




12054788 Fluid spindle, up to 55.000 rpm

Fixation	W serration
Mounting	ER 11
Cooling	external, p_{max} 40 bar
X / Y / Z	110 (4.33) / - / 75.6 (2.98) mm (")


Tool holder
Shank INDEX TRAUB CAPTO C6

INDEX **TRAUB**




12080335 Drilling tool holder

Mounting Hydraulic expansion chuck D20




12081936 Drilling tool holder

Mounting ER25




12081937 Drilling tool holder

Mounting ER32




12081930 Drilling tool holder

Mounting D6 (0.24")




12081931 Drilling tool holder

Mounting D8 (0.31")



12081932 Drilling tool holder

Mounting D10 (0.39")




12081933 Drilling tool holder

Mounting D12 (0.47")


Tool holder
Shank INDEX TRAUB CAPTO C6

INDEX **TRAUB**




12081934 Drilling tool holder

Mounting D16 (0.63")




12081935 Drilling tool holder

Mounting D20 (0.79")




12081923 Drilling tool holder

Mounting Weldon D10 (0.39")




12081925 Drilling tool holder

Mounting Weldon D12 (0.47")




12081926 Drilling tool holder

Mounting Weldon D16 (0.63")



12081927 Drilling tool holder

Mounting Weldon D20 (0.79")




12081928 Drilling tool holder

Mounting Weldon D25 (0.98")


Tool holder Shank INDEX TRAUB CAPTO C6

INDEX **TRAUB**




12081929 Drilling tool holder

Mounting Weldon D32 (1.26")




12081946 Turning tool holder, left

Mounting for CC.. 1204..




12081945 Turning tool holder, right

Mounting for CC.. 1204..




12081939 Turning tool holder

Mounting for CN.. 1204..




12081943 Turning tool holder, left

Mounting for DC.. 11T3..



12081942 Turning tool holder, right

Mounting for DC.. 11T3..

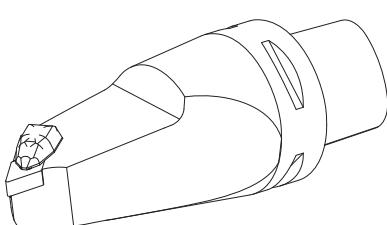


12081940 Turning tool holder, left

Mounting for DN.. 1104..


**Tool holder
Shank INDEX TRAUB CAPTO C6**

INDEX TRAUB




12081941 Turning tool holder

Mounting for VB.. 1604..




12081860 Milling cutter holder

Mounting Milling shaft D22 (0.87")




12081921 Milling cutter holder

Mounting Milling shaft D27 (1.06")




12081922 Milling cutter holder

Mounting Milling shaft D32 (1.26")




10057861 Blanking plug

Mounting -




10613579 Drilling tool holder

Form A
Mounting ER 25
Cooling internal, p_{\max} 80 bar
X / Z 80 (3.15) / – mm ("")




11014241 Drilling tool holder

Form A
Mounting ER 32
Cooling internal, p_{\max} 80 bar
X / Z 100 (3.94) / – mm ("")




10155467 Drilling tool holder

Form A
Mounting ER 40
Cooling internal, p_{\max} 80 bar
X / Z 120 (4.72) / – mm ("")




10314608 Drilling tool holder

Form A
Mounting DIN 1835 B/E D6 (0.24 "")
Cooling internal, p_{\max} 40 bar
X / Z 65 (2.56) / – mm ("")




10971880 Drilling tool holder

Form A
Mounting DIN 1835 B/E D10 (0.39 "")
Cooling internal, p_{\max} 40 bar
X / Z 65 (2.56) / – mm ("")




10911654 Drilling tool holder

Form A
Mounting DIN 1835 B/E D14 (0.55 "")
Cooling internal, p_{\max} 40 bar
X / Z 74 (2.91) / – mm ("")




10832431 Drilling tool holder

Form A
Mounting D6 (0.24 "")
Cooling internal, p_{\max} 80 bar
X / Z 65 (2.56) / – mm ("")




10102317 Drilling tool holder

Form	A
Mounting	D8 (0.31 ")
Cooling	internal, p_{max} 80 bar
X / Z	65 (2.56) / – mm (")




10577378 Drilling tool holder

Form	A
Mounting	D10 (0.39 ")
Cooling	external and internal, p_{max} 40 bar
X / Z	60 (2.36) / – mm (")




10533702 Drilling tool holder

Form	A
Mounting	D10 (0.39 ")
Cooling	internal, p_{max} 80 bar
X / Z	65 (2.56) / – mm (")




10911571 Drilling tool holder

Form	A
Mounting	D12 (0.47 ")
Cooling	external and internal, p_{max} 40 bar
X / Z	65 (2.56) / – mm (")




10221444 Drilling tool holder

Form	A
Mounting	D12 (0.47 ")
Cooling	internal, p_{max} 80 bar
X / Z	80 (3.15) / – mm (")




10632086 Drilling tool holder

Form	A
Mounting	D14 (0.55 ")
Cooling	internal, p_{max} 80 bar
X / Z	80 (3.15) / – mm (")




10294556 Drilling tool holder

Form	A
Mounting	D16 (0.63 ")
Cooling	external and internal, p_{max} 40 bar
X / Z	70 (2.76) / – mm (")




10415848 Drilling tool holder

Form A
Mounting D16 (0.63 ")
Cooling internal, p_{max} 80 bar
X / Z 80 (3.15) / – mm (")




10258850 Drilling tool holder

Form A
Mounting D16 (0.63 ")
Cooling internal, p_{max} 40 bar
X / Z 82 (3.23) / – mm (")




10573083 Drilling tool holder

Form A
Mounting D18 (0.71 ")
Cooling internal, p_{max} 80 bar
X / Z 80 (3.15) / – mm (")




10313716 Drilling tool holder

Form A
Mounting D20 (0.79 ")
Cooling external and internal, p_{max} 40 bar
X / Z 70 (2.76) / – mm (")




10336873 Drilling tool holder

Form A
Mounting D20 (0.79 ")
Cooling internal, p_{max} 80 bar
X / Z 80 (3.15) / – mm (")




10316061 Drilling tool holder

Form A
Mounting D25 (0.98 ")
Cooling external and internal, p_{max} 40 bar
X / Z 85 (3.35) / – mm (")




10695393 Drilling tool holder

Form A
Mounting D25 (0.98 ")
Cooling internal, p_{max} 80 bar
X / Z 110 (4.33) / – mm (")




10480145 Drilling tool holder

Form	A
Mounting	D32 (1.26 ")
Cooling	external and internal, p_{\max} 40 bar
X / Z	90 (3.54) / – mm (")




10123145 Drilling tool holder

Form	A
Mounting	D32 (1.26 ")
Cooling	internal, p_{\max} 80 bar
X / Z	110 (4.33) / – mm (")




11084060 Drilling tool holder

Form	A
Mounting	D40 (1.57 ")
Cooling	internal, p_{\max} 80 bar
X / Z	120 (4.72) / – mm (")




10080883 Drilling tool holder, with shrink-fit mounting

Form	A
Mounting	Shrink-fit mounting D6
Cooling	internal, p_{\max} 80 bar
X / Z	80 (3.15) / – mm (")




10332024 Drilling tool holder, with shrink-fit mounting

Form	A
Mounting	Shrink-fit mounting D8
Cooling	internal, p_{\max} 80 bar
X / Z	80 (3.15) / – mm (")



10614975 Drilling tool holder, with shrink-fit mounting

Form	A
Mounting	Shrink-fit mounting D10
Cooling	internal, p_{\max} 80 bar
X / Z	85 (3.35) / – mm (")




10393926 Drilling tool holder, with shrink-fit mounting

Form	A
Mounting	Shrink-fit mounting D12
Cooling	internal, p_{\max} 80 bar
X / Z	90 (3.54) / – mm (")


Tool holder Shank HSK63

INDEX TRAUB




10210179 Drilling tool holder, with shrink-fit mounting

Form	A
Mounting	Shrink-fit mounting D14
Cooling	internal, p_{\max} 80 bar
X / Z	90 (3.54) / – mm (")




10216107 Drilling tool holder, with shrink-fit mounting

Form	A
Mounting	Shrink-fit mounting D16
Cooling	internal, p_{\max} 80 bar
X / Z	95 (3.74) / – mm (")




10058603 Drilling tool holder, with shrink-fit mounting

Form	A
Mounting	Shrink-fit mounting D18
Cooling	internal, p_{\max} 80 bar
X / Z	95 (3.74) / – mm (")




10563039 Drilling tool holder, with shrink-fit mounting

Form	A
Mounting	Shrink-fit mounting D20
Cooling	internal, p_{\max} 80 bar
X / Z	100 (3.94) / – mm (")




10580090 Drilling tool holder, with shrink-fit mounting

Form	A
Mounting	Shrink-fit mounting D25
Cooling	internal, p_{\max} 80 bar
X / Z	115 (4.53) / – mm (")




10626721 Drilling tool holder, with shrink-fit mounting

Form	A
Mounting	Shrink-fit mounting D32
Cooling	internal, p_{\max} 50 bar
X / Z	90 (3.54) / – mm (")




10319547 Drilling tool holder, with shrink-fit mounting

Form	A
Mounting	Shrink-fit mounting D32
Cooling	internal, p_{\max} 80 bar
X / Z	120 (4.72) / – mm (")




10869184 Drilling tool holder

Form	A
Mounting	Hydraulic expansion chuck D20
Cooling	internal, p_{\max} 80 bar
X / Z	80 (3.15) / – mm (")




10912300 Drilling tool holder

Form	A
Mounting	Hydraulic expansion chuck D20
Cooling	internal, p_{\max} 80 bar
X / Z	90 (3.54) / – mm (")




11076575 Drilling tool holder

Form	A
Mounting	Hydraulic expansion chuck D25
Cooling	internal, p_{\max} 80 bar
X / Z	120 (4.72) / – mm (")




10948579 Milling cutter holder

Form	A
Mounting	Milling shaft D16 (0.63 ")
Cooling	–
X / Z	50 (1.97) / – mm (")




10662987 Milling cutter holder

Form	A
Mounting	Milling shaft D22 (0.87 ")
Cooling	–
X / Z	48 (1.89) / – mm (")



10906655 Milling cutter holder

Form	A
Mounting	Milling shaft D22 (0.87 ")
Cooling	–
X / Z	75 (2.95) / – mm (")




10834685 Milling cutter holder

Form	A
Mounting	Milling shaft D27 (1.06 ")
Cooling	–
X / Z	48 (1.89) / – mm (")


Tool holder Shank HSK63

INDEX TRAUB




11000253 Milling cutter holder

Form	A
Mounting	Milling shaft D32 (1.26 ")
Cooling	–
X / Z	46 (1.81) / – mm (")




10380342 Milling cutter holder

Form	A
Mounting	Milling shaft D32 (1.26 ")
Cooling	–
X / Z	55 (2.17) / – mm (")




10005857 Milling cutter holder

Form	A
Mounting	Milling shaft D40 (1.57 ")
Cooling	–
X / Z	56 (2.20) / – mm (")




11021692 Turning tool holder

Form	B
Mounting	square 20x20
Cooling	external, p_{max} 20 bar
X / Z	85 (3.35) / 35 (1.38) mm (")




10345241 Turning tool holder

Form	A
Mounting	square 25x25
Cooling	external, p_{max} 20 bar
X / Z	127 (5) / 31 (1.22) mm (")




10728848 Turning tool holder

Form	A
Mounting	square 25x25
Cooling	external, p_{max} 20 bar
X / Z	127 (5) / 31 (1.22) mm (")




10981030 Turning tool holder

Form	T
Mounting	for CC.. 1204..
Cooling	external, p_{max} 80 bar
X / Z	100 (3.94) / – mm (")




10809872 Turning tool holder

Form T
Mounting for CN.. 1204..
Cooling external, p_{\max} 80 bar
X / Z 100 (3.94) / – mm (")




11016276 Turning tool holder

Form T
Mounting for DC.. 11T3..
Cooling external, p_{\max} 80 bar
X / Z 100 (3.94) / – mm (")




10652895 Turning tool holder

Form T
Mounting for DN.. 1506..
Cooling external, p_{\max} 80 bar
X / Z 100 (3.94) / – mm (")




10468828 Turning tool holder

Form T
Mounting for VC.. 1604..
Cooling external, p_{\max} 80 bar
X / Z 100 (3.94) / – mm (")




10036901 Basic holder

Form A
Mounting –
Cooling external, p_{\max} 40 bar
X / Z 47 (1.85) / – mm (")




11171043 Boring head

Form –
Mounting for CN.. 1204..
Cooling internal, p_{\max} 50 bar
X / Z 26 (1.02) / 35 (1.38) mm (")




10939796 Boring head

Form –
Mounting for DN.. 1506..
Cooling internal, p_{\max} 50 bar
X / Z 26 (1.02) / 35 (1.38) mm (")




10714245 Boring head

Form	–
Mounting	for DN.. 1506..
Cooling	internal, p_{\max} 50 bar
X / Z	36 (1.42) / 35 (1.38) mm (")




11171044 Boring head

Form	–
Mounting	for DN.. 1506..
Cooling	internal, p_{\max} 50 bar
X / Z	36 (1.42) / 35 (1.38) mm (")




11171041 Boring head

Form	–
Mounting	for VC.. 1604..
Cooling	internal, p_{\max} 50 bar
X / Z	36 (1.42) / 35 (1.38) mm (")




10089863 Boring head

Form	–
Mounting	for VB.. 1604..
Cooling	internal, p_{\max} 50 bar
X / Z	36 (1.42) / 45 (1.77) mm (")




11004747 Boring head

Form	–
Mounting	for VB.. 1604..
Cooling	internal, p_{\max} 50 bar
X / Z	36 (1.42) / 45 (1.77) mm (")




10241275 Boring head

Form	–
Mounting	–
Cooling	internal, p_{\max} 50 bar
X / Z	26 (1.02) / 35 (1.38) mm (")




12069220 Fluid spindle

Form	A
Mounting	ER 11
Cooling	–, p_{\max} 40 bar
X / Z	/ – mm (")




10044398 Setting tool holder, for measuring the clamping stroke

Form	A
Mounting	—
Cooling	—
X / Z	26 (1.02) / – mm ("")




10752653 Grooving tool holder

Form	T
Mounting	Trapezoid 32x8
Cooling	external, p_{max} 80 bar
X / Z	145 (5.71) / 27 (1.06) mm ("")




12014106 Grooving tool holder

Form	T
Mounting	Trapezoid 32x8
Cooling	external and internal, p_{max} 80 bar
X / Z	101.75 (4.01) / 13 (0.51) mm ("")




12014107 Grooving tool holder

Form	T
Mounting	Trapezoid 32x8
Cooling	external and internal, p_{max} 80 bar
X / Z	101.75 (4.01) / 13 (0.51) mm ("")

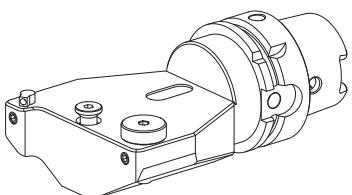


11168128 Grooving tool holder

Form	A
Mounting	—
Cooling	external, p_{max} 20 bar
X / Z	110 (4.33) / 5 (0.20) mm ("")

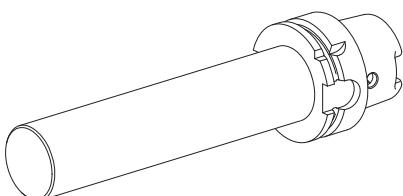

10751501 Calibrating tool

Form	A
Mounting	—
Cooling	—, p_{max} 40 bar
X / Z	200 (7.87) / – mm ("")



10899654 Blanking plug

Form	A
Mounting	—
Cooling	—
X / Z	26 (1.02) / – mm ("")

INDEX **TRAUB**

INDEX **TRAUB**



DIW045EN - 20171933 01.22 Printed in Germany Subject to change without prior notice

**INDEX-Werke GmbH & Co. KG
Hahn & Tessky**

Plochinger Straße 92
D-73730 Esslingen

Fon +49 711 3191-0
Fax +49 711 3191-587

info@index-werke.de
www.index-werke.de