


## Gear cutting unit Circular prism 3:1 Mil


### Technical features

Shank TNL	Circular prism
Drive	Spur gear TRAUB TNL12
Fixation TNL	Central tensioning screw
Speed ratio	3:1
Mounting	Milling shaft D6
reversible 180°	no
Direction	opposite to drive direction
X [mm]	44.7 (1.76")
Y [mm]	—
Z [mm]	4 (0.16)
INDEX TRAUB products	TNL12.2



### Note

The machine must have an electronic transmission! Can be used only on the upper turret!

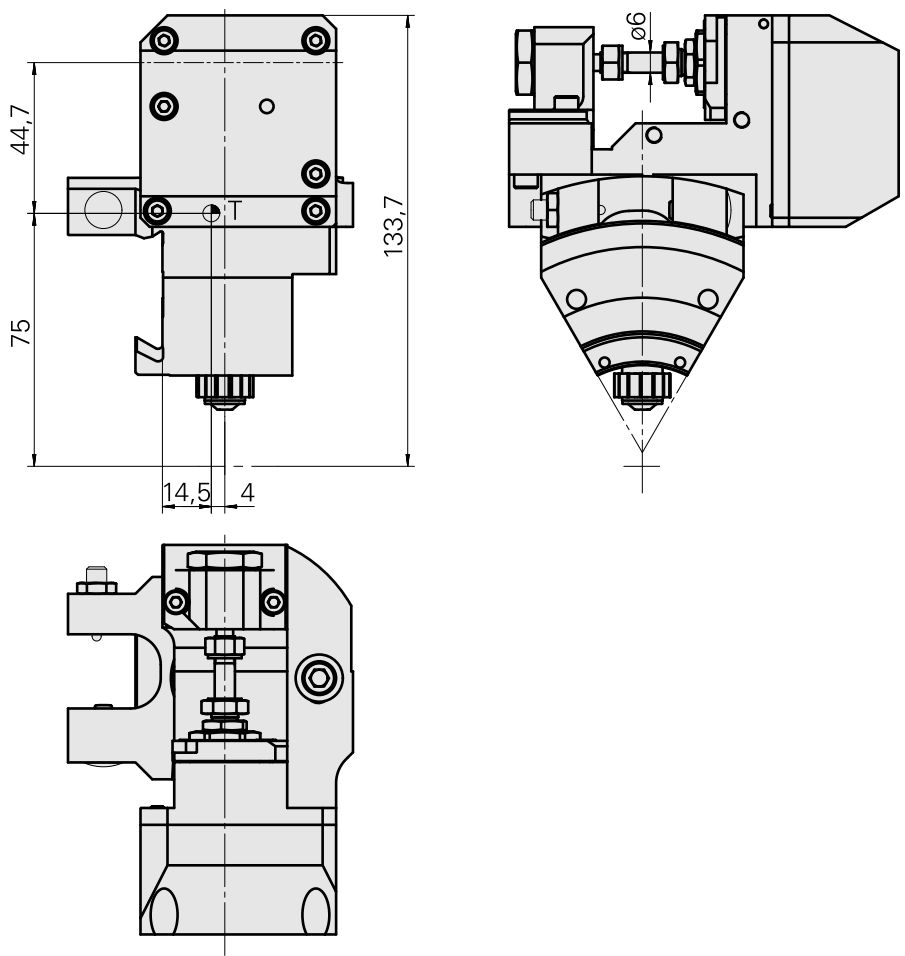

---

**Documents**

No downloads available for this product