

Drilling unit Circular prism 1:3,85 WFB

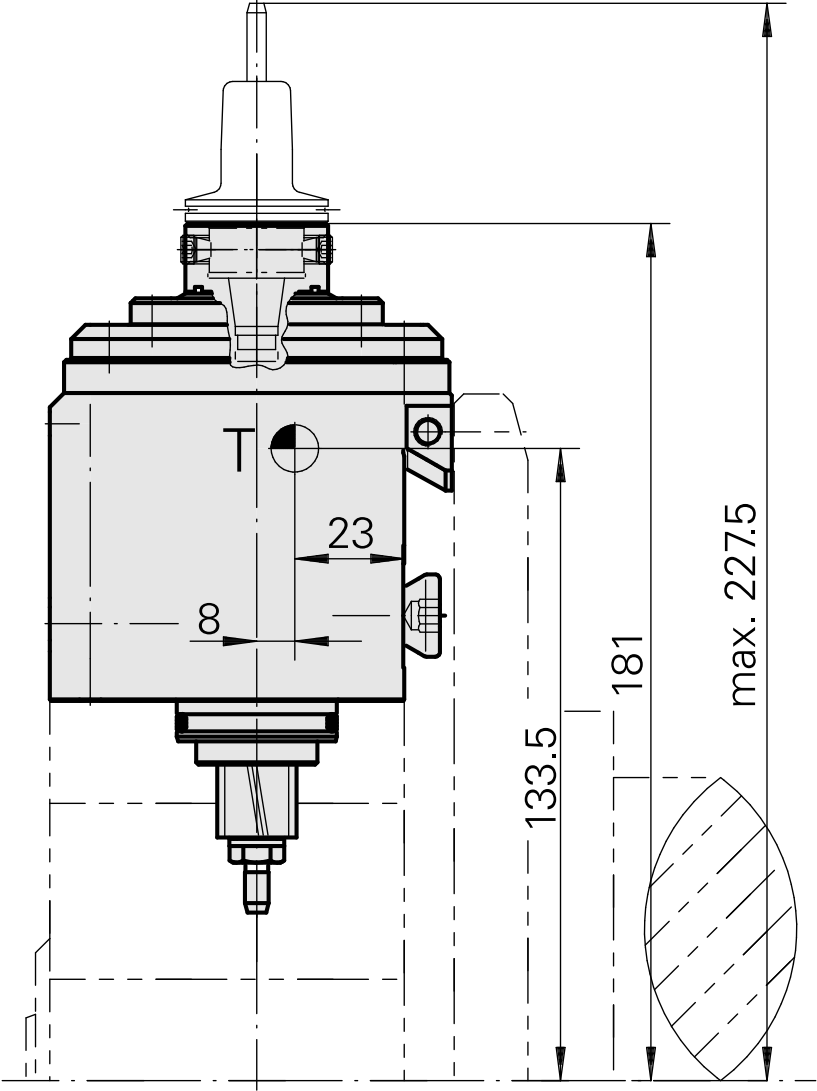
Technical features

Shank TNL	Circular prism
Drive	Overall drive
Fixation TNL	Central tensioning screw
Speed ratio	1:3,85
Cooling	external
Pressure	30 bar
Mounting	WFB 20-12
INDEX TRAUB products	TNK36 • TNL26



Note

No dry-run permitted!



Documents

Product notes

[DE \(pdf\)](#)

[EN \(pdf\)](#)

[FR \(pdf\)](#)

[PT \(pdf\)](#)

Accessories

Optional accessories

Other accessories

[Nozzle](#)

Product ID : 10693279

Previous product ID : 835949

[Countersunk screw](#)

Product ID : 10218470

Previous product ID : 410330.0306

[Adapter WFB 20-12 shrinking](#)

Product ID : 10477939

Previous product ID : 904006

[Adapter WFB 20-12 Weldon](#)

Product ID : 10221340

Previous product ID : 904007

[Adapter WFB 20-12 with collet mounting](#)

Product ID : 10625654

Previous product ID : 904008

[adapter WFB 20-12 mill arbor mounting](#)

Product ID : 10489061

Previous product ID : 904009

[Adapter WFB 20-12 Hydr. expansion chuck](#)

Product ID : 10566889

Previous product ID : 904010

[WFB for Turning tool holder](#)

Product ID : 10146029

Previous product ID : 904011

[WFB for tap chuck](#)

Product ID : 11004600

Previous product ID : WZ9990.9613F

[WFB miscellaneous mountings](#)

Product ID : 10243177

Previous product ID : WZ9990.9612F

[TORX SCREW M6 X 7MM M 6x1x7](#)

Product ID : 10004947

Previous product ID : 326171
