

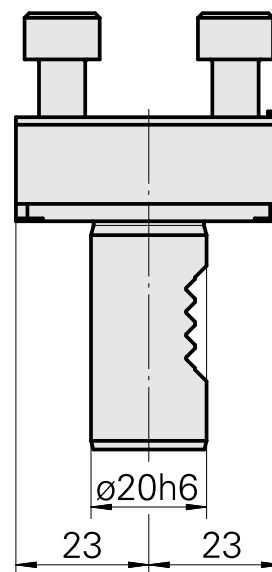
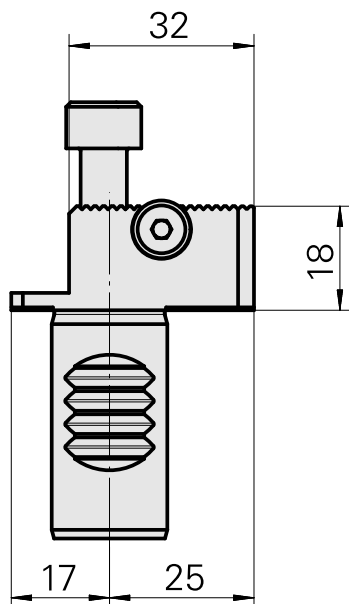


## Basic holder VDI 20, vertically adjustable

### Technical features

|                  |               |
|------------------|---------------|
| Shank VDI        | VDI 20        |
| Drive            | not live      |
| Fixation VDI     | none          |
| Cooling          | external      |
| Pressure         | 20 bar        |
| reversible 180°  | no            |
| X [mm]           | 18 (0.71")    |
| Y [mm]           | –             |
| Z [mm]           | 0 ()          |
| Tool turret type | Radial turret |



## Documents

No downloads available for this product

## Accessories

### Optional accessories

#### Tool holders with VDI shank

##### [Grooving tool holding block square 16x16](#)

Product ID : 10911465

Previous product ID : W62351.5010

|                      |                     |                     |                          |
|----------------------|---------------------|---------------------|--------------------------|
| Drive<br>not live    | Cooling<br>external | Pressure<br>20 bar  | Mounting<br>Square 16x16 |
| X [mm]<br>51 (2.01") | Y [mm]<br>–         | Z [mm]<br>12 (0.47) |                          |

##### [Grooving tool holding block square 16x16](#)

Product ID : 10117567

Previous product ID : W62351.5110

|                      |                     |                     |                          |
|----------------------|---------------------|---------------------|--------------------------|
| Drive<br>not live    | Cooling<br>external | Pressure<br>20 bar  | Mounting<br>Square 16x16 |
| X [mm]<br>51 (2.01") | Y [mm]<br>–         | Z [mm]<br>12 (0.47) |                          |

##### [Grooving tool holding block Trapezoid 26](#)

Product ID : 10412504

Previous product ID : W62350.5070

|                      |                     |                       |                            |
|----------------------|---------------------|-----------------------|----------------------------|
| Drive<br>not live    | Cooling<br>external | Pressure<br>20 bar    | Mounting<br>Trapezoid 26x4 |
| X [mm]<br>41 (1.61") | Y [mm]<br>–         | Z [mm]<br>23.5 (0.93) |                            |