
Back end unit MS32/MS40 1:1,25 WFB 24-16, for control C200-sl


Technical data



Slide system MS	MS32/MS40
Drive	Direct drive
Fixation MS	Splined key/pin
Speed ratio	1:1,25
Mounting	WFB 24-16
X [mm]	37 (1.46")
Y [mm]	–
Z [mm]	76 (2.99)
INDEX TRAUB products	MS40-8

Note

Can be used only in positions X.3! The unit must be connected to a central oil/air lubrication system! The unit may only be used in combination with any of the specified motors and the corresponding UNIT! Motor (AC), 9 Nm – 12107823 (Siemens 1FT7064-1AK74-1NG1) included. UNIT 306

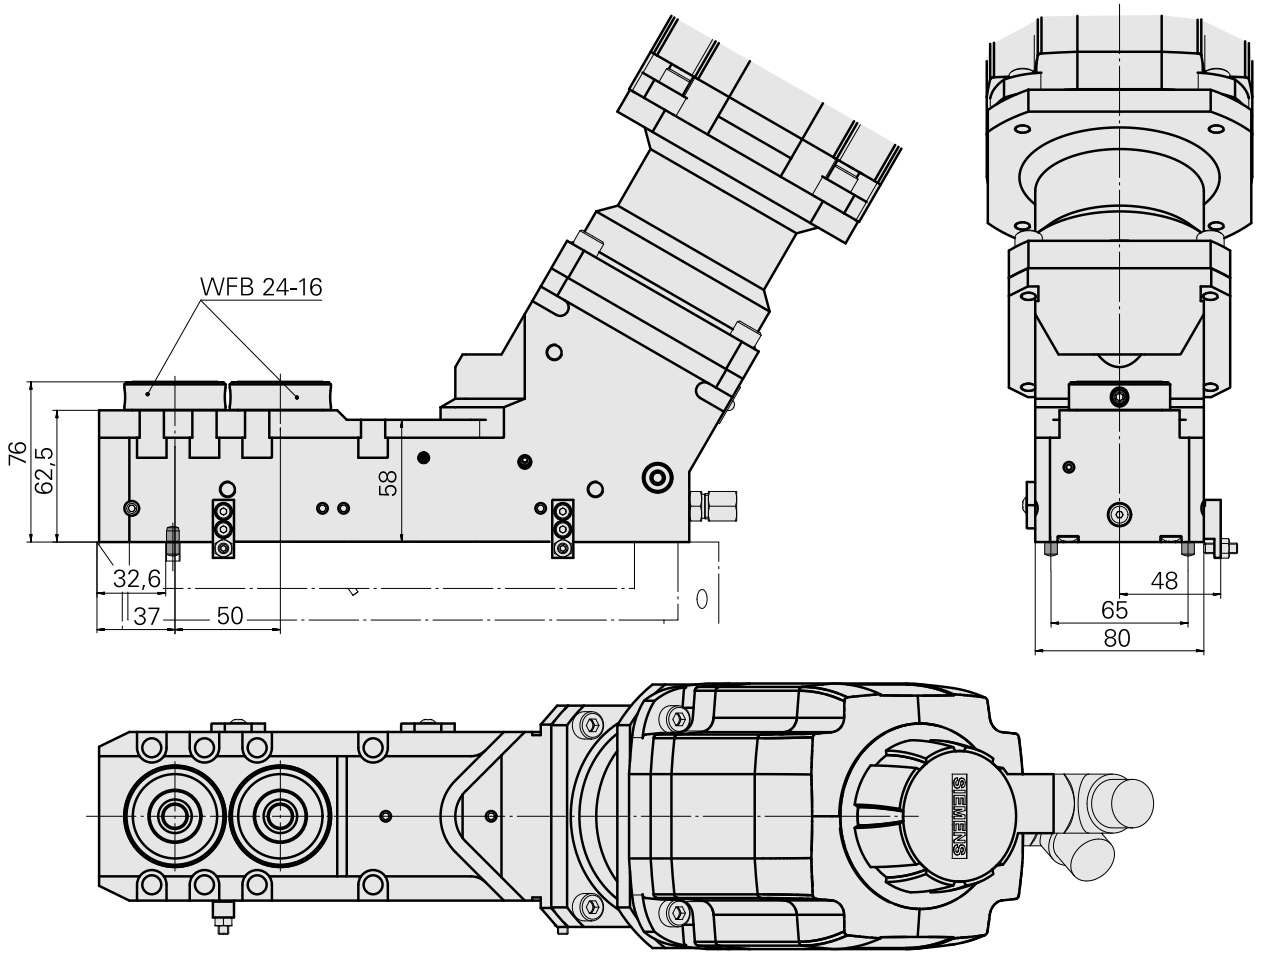
WFB 24-16
76
62,5
58
32,6
37
50
0
48
65
80
SIEMENS

Documents

Product notes

DE (pdf)

EN (pdf)

FR (pdf)

Accessories

Required for operation

Assembly parts

Product ID : 11170197
Previous product ID : W00031.0029

Cable kit, 3m

Product ID : 10884966
Previous product ID : GM5601.0267

Optional accessories

Servomotor

AC motor

Product ID : 12107823
Previous product ID :

manufacturer product line Siemens	Electrical assemblies Servomotor	manufacturer product line 1FT7	Voltage 600 Volt
(Nominal) speed (rpm) 6000 1/minute	Rated power W 2600 Watt	(Stall) torque [Nm] 9 Newton/meter	Plug connection/type M23 (size 1 / encoder)
Protection class IP65	Encoder resolution (ST) 2048 Piece	Encoder type Increment	Brake no – unbraked
Motor design IM B5			

Other accessories

Shrink WFB 24-16 adapter

Product ID : 10240359
Previous product ID : WZ9990.2406F

WFB with Weldon mounting

Product ID : 10858681
Previous product ID : WZ9990.2407F

Adapter WFB 24-16 with collet mounting

Product ID : 10761774
Previous product ID : WZ9990.2408F

WFB miscellaneous mountings

Product ID : 10553585
Previous product ID : WZ9990.2499F

Grub screw M 8x1x 9,5

Product ID : 10336217
Previous product ID : 326419