


Gear cutting unit Circular prism 3:1 Mil


Technical data

| | |
|----------------------|-----------------------------|
| Shank TNL | Circular prism |
| Drive | Spur gear TRAUB TNL12 |
| Fixation TNL | Central tensioning screw |
| Speed ratio | 3:1 |
| Mounting | Milling shaft D6 |
| reversible 180° | no |
| Direction | opposite to drive direction |
| X [mm] | 44.7 (1.76") |
| Y [mm] | — |
| Z [mm] | 4 (0.16) |
| INDEX TRAUB products | TNL12.2 |



Note

The machine must have an electronic transmission! Can be used only on the upper turret!

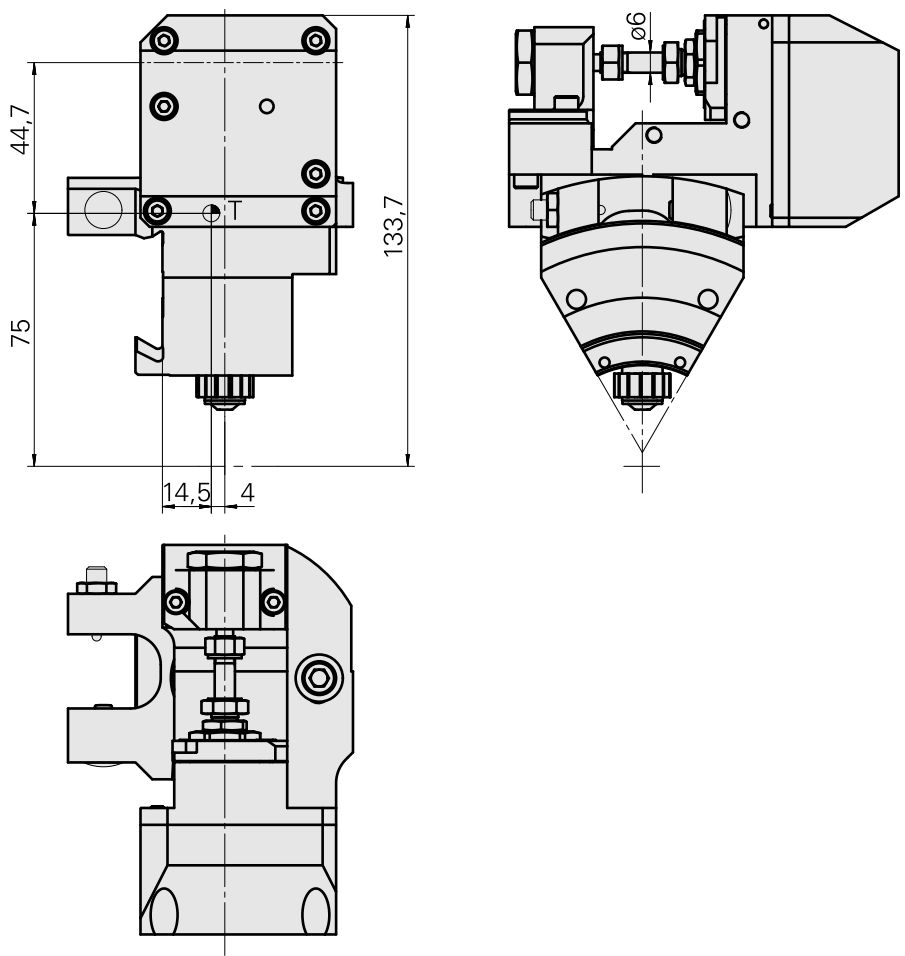

Documents

No downloads available for this product